

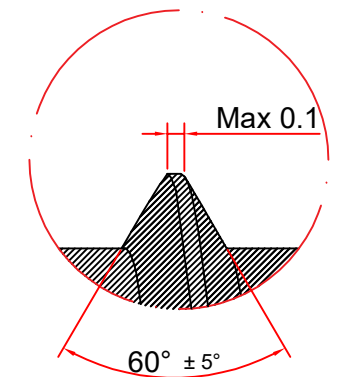
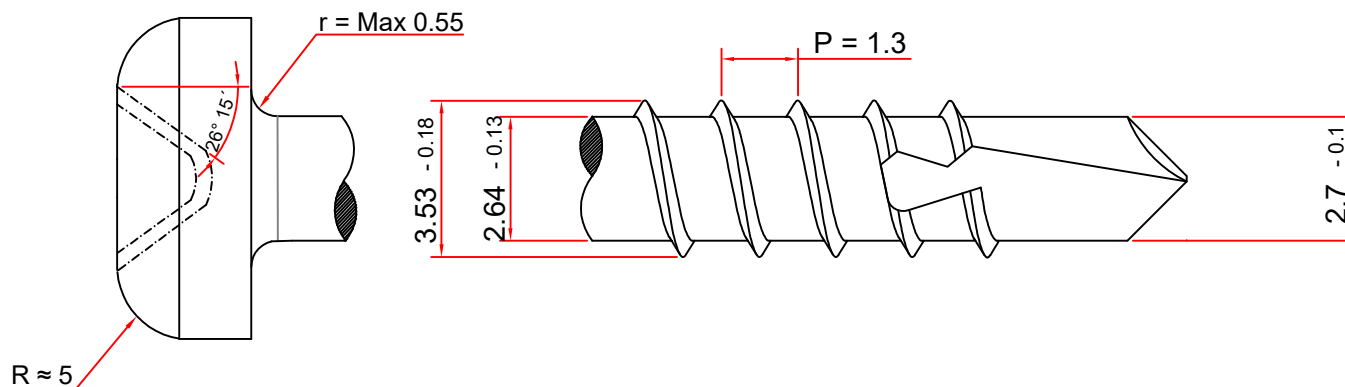
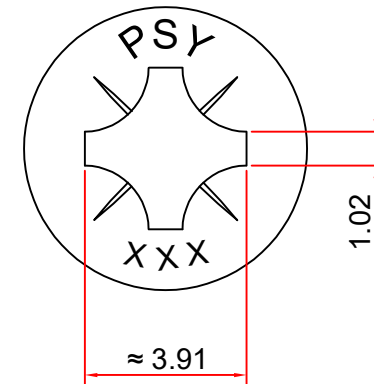


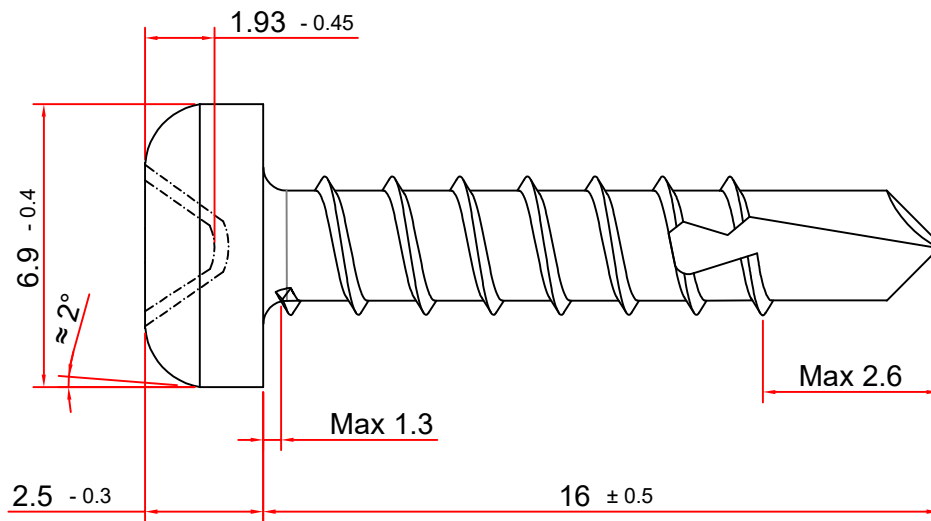

Coating thickness : Min 15µm

Case Depth: 50µm-180µm

Breaking torque : Min 2.7 N.m



RE.VE:	DATA	---	NAME	---	Description	---	Machine	---	Core Hardness (HV)	270-390	
							Material	1018	Surface Hardness(HV)	Min 500	
Standard List		Part NO	7903016061				 سپند پیچ یزد SEPAND PITCH CO.	Dia.of Material	---	T.S (Mpa)	---
Dimension	C16 1625	Part name	VIS CBLZ PERC TOLE 3.5 L16 AC Z15DFNR					diameter blank	---	Y.S (Mpa)	---
Mechanical	C10 0060	DWG.NO	DN7903016061/00					length blank	---	Proof Load (N)	---
Coating	B15 4101	---	Name	Data	Scale	5/1		Weight	1.07 gr	EL (%)	---
Tolerances	---	Drawn	B.Salehizade	00/10/18	Safety	☐		Production process Wire Rod	SAIP2	Type Coating	Z15DFNR
Other Standard	C10 0120	Cheked	M.Irandost	00/10/18	Regularity	☐		Quality Class	Cementation	Salt Spray To Sediment Red	---
		Confirmed	K.Farahmand	00/10/18	Unit : mm			Coating	Coromate	Salt Spray To Sediment Withe	200 h
Customer Name :								SAPCO			