

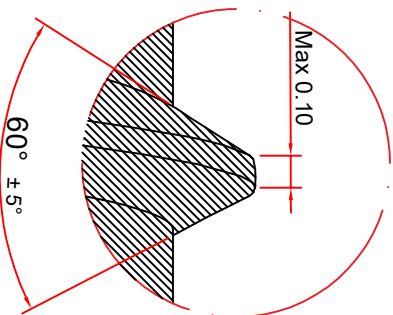
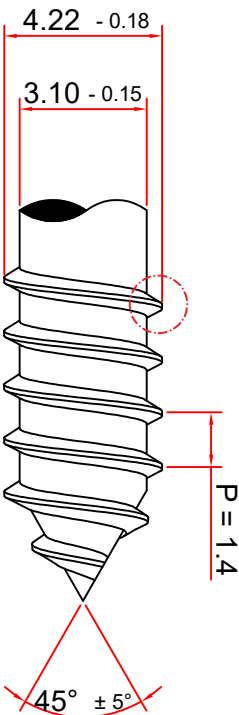
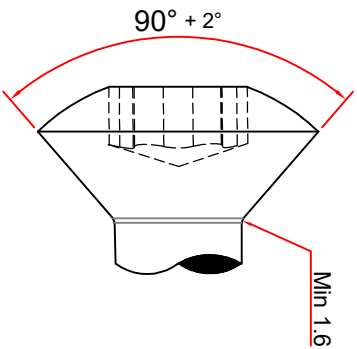
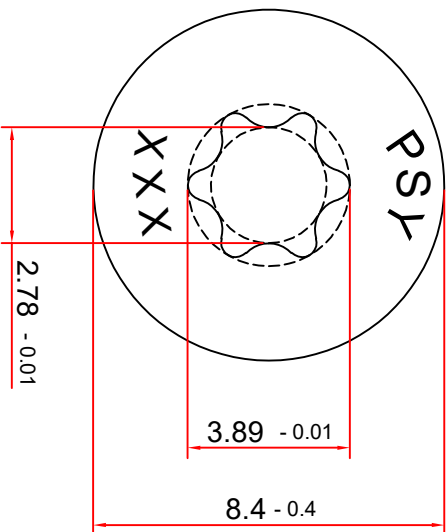


Torx T=20

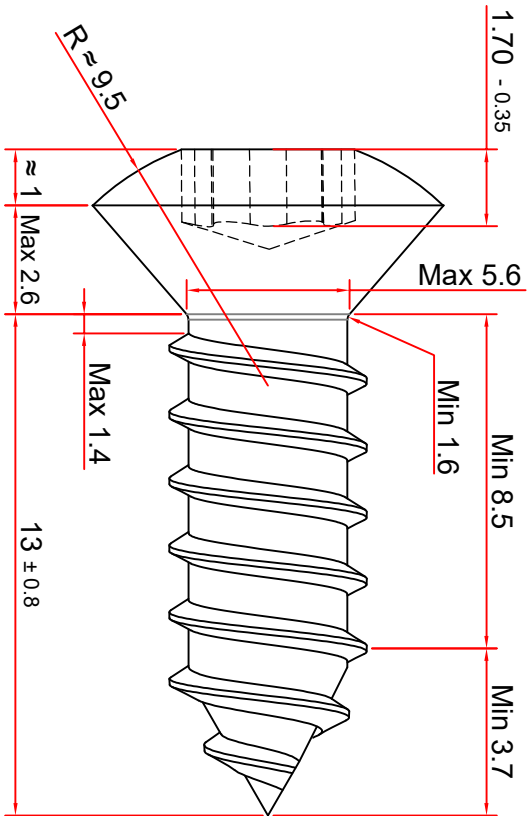

RE. VE:	DATA	---	NAME	---	Description	---
Standard List		Part NO	7903016384			
Dimension	C10 0300	Part name	FBX ST4.2 L13 AC Z15DFJR C			
Mechanical	C10 0060	DWG. NO	DN/7903016384/00			
Coating	B15 4101	---		Name	Data	Scale
Tolerances	C16 1605	Drawn	B. Salehizade	00/09/03	Safety	5/1
Other Standard	---	Checked	M. Irandost	00/09/03	Regularity	☐
		Confirmed	K. Farahmand	00/09/03	Unit : mm	☒
 سپند پیچ یزد SE PAND PITCH CO.						
Machine	---	Core Hardness (HV)		270-390		
Material	1018	Surface Hardness(HV)		Min 500		
Dia. of Material	---	T.S (Mpa)		---		
diameter blank	3.35	Y.S (Mpa)		---		
length blank	---	Proof Load (N)		---		
Weight	1.51 gr	EL (%)		---		
Production process Wire Rod	SAIP2	Type Coating		Z15DFJR		
Quality Class	Cementation	Salt Spray To Sediment Red		Golden		
Coating	Coromate	Salt Spray To Sediment White		200 h		
Customer Name :		SAPCO				

Coating thickness : Min 15µm

Case Depth: 100µm- 230µm

Breaking torque : Min 4.4 N.m