
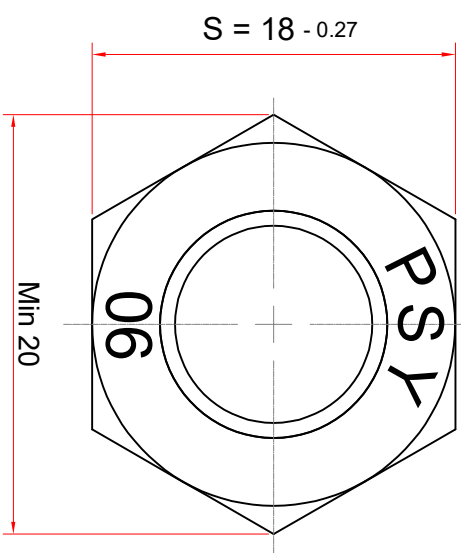
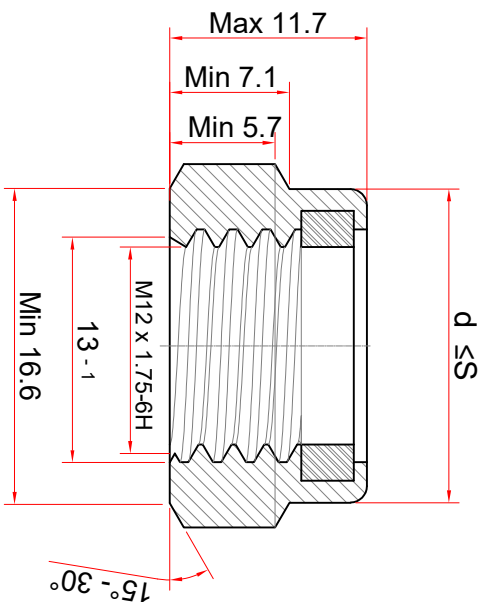



For Press

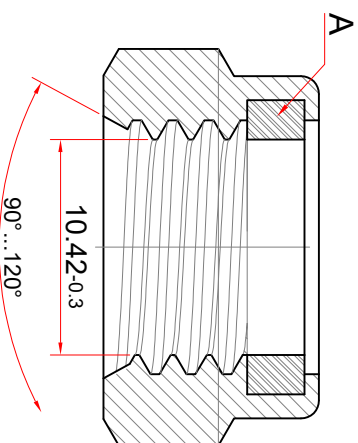

Scale : 1.9 : 1

Coating thickness :Min 10µm
prevailing torque at first fixing :Max 5.6N.m
prevailing torque at first Removal :Min 3.3N.m
prevailing torque at third Removal :Min 2N.m

Hardness : 74 - 82Shore D
Material: Non metallic (polyamide)
A:Prevailing Torque Element

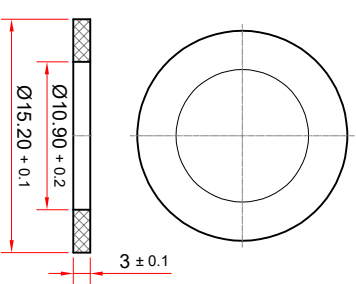

RE.VE:1	DATE	03/05/15	NAME	M.abadiyan	Description	افسافه کردن پارامتر مشخصات پوشش
RE.VE:2	DATE	03/08/03	NAME	M.abadiyan	Description	افسافه کردن ابعاد پرش
Standard List		Part NO	7903234036			
Dimension	PSA C213414	Part name	M 12x 1.75-6H			
Mechanical	PSA C200060	DWG.NO	DN7903234036/02			
Coating	PSA B154101	---		Name	Data	Scale
Tolerances	PSA C200220	Drawn	M.Zolfaghri	02/04/14	Safety	☐
Other Standard	PSA B113110	Checked	S.Zabih	02/04/14	Regularity	☐
		Confirmed	K.Farahmand	02/04/14	Unit : mm	☒
 سپند پیچ SEPPAND PITCH CO.						
Machine		19B	Core Hardness		188-360HV Max 36HRC	
Material		10B21 10B38	Surface Hardness		---	
Dia. of Material		19	T.S (Mpa)		---	
diameter blank		17.10	Y.S (Mpa)		---	
length blank		---	Proof Load		50500N	
Weight(gr)		12.73	EL (%)		---	
Rod Production process		PASAP	Type Coating		Z5F JR	
Quality Class		06	Color		Yellow	
Coating		Chromate	Salt Spray To Sediment Red		96hr	
Customer Name :		SAPCO		Salt Spray To Sediment White		
				72hr		