
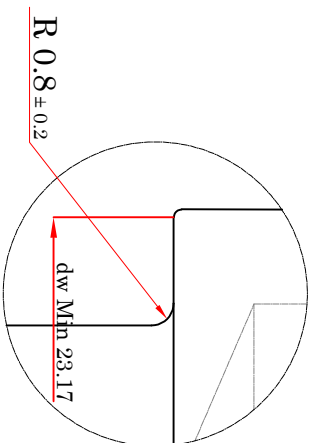
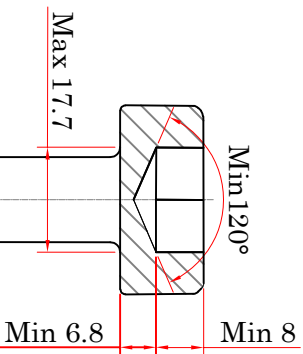
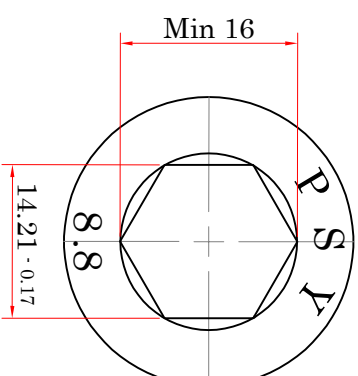


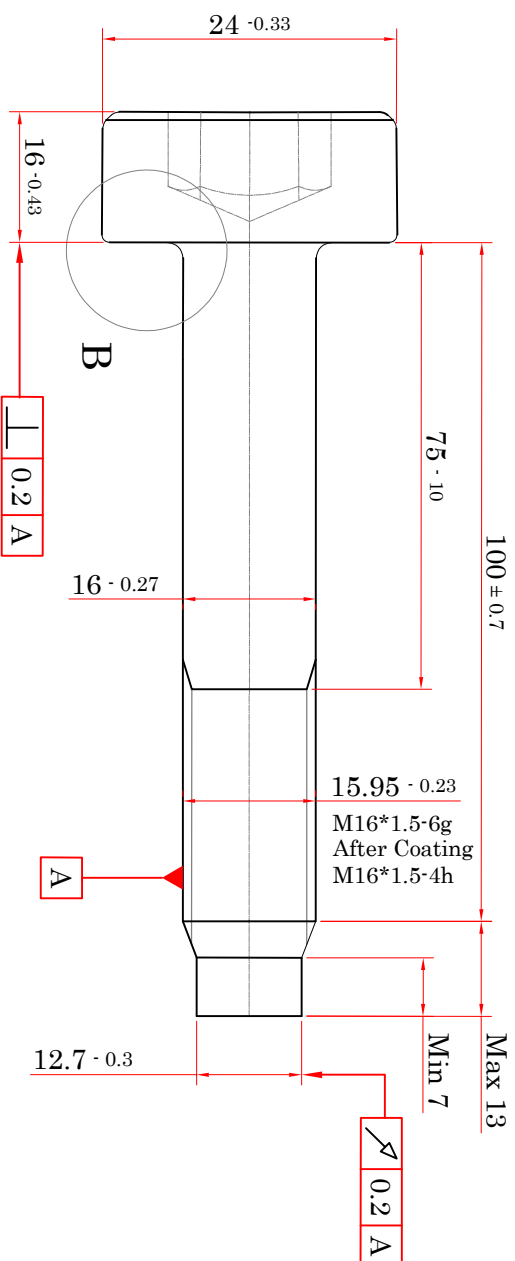

Detail B

- 1- FN : 0.12 - 0.18
- 2- F_m : 133800 N- 167250 N
- 3- Depth of decarburization : Max 0.31 mm
- 4- Depth of complete decarburization : Max 0.015mm
- 5- Coating thickness : Min 10 μ m
- 6- Steel Cleanliness : Check the Cleanliness of steel in accordance with the standard NFA.04-106
- 7- Structure before tempering : structure with more than 90%martensite at the centre in the hardened state.

14.99 $\pm$ 0.14
Dia. Before Thread Rolling

Scale: 1:2

RE.VE:1	DATE	1403/02/17	NAME	S.Zabih	Description	اصلاح تشرانس قطر ساقه و تشرانس های انگسی و نامبر کوی	
RE.VE:2	DATE	1403/10/10	NAME	M.Abadyan	Description	اصلاح اندازه زیر کله تا روزه	
Standard List	Part NO	9159525680				 سپند پیچ یزد SEPAND PITCH CO.	
	Part name	M16*1.5*113-8.8					
Dimension	C130910-B112125						
Mechanical	C10 0020	DWG.NO	DN9159525680/02				
Coating	B15 4101	---	Name	Data	Scale		1:1.2
Tolerances	---	Drawn	s.zabih	00/08/08	Safety		☐
Other Standard	C13 0910	Checked	M.Irandost	00/08/08	Regularity		☐
	Confirmed	K.Farahmand	00/08/08	Unit : mm			
Customer Name : SAPCO							

پیچ مخصوص نصب بالای
کمک فنر به اکسل عقب