

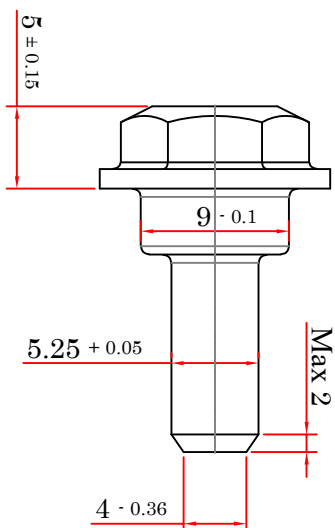
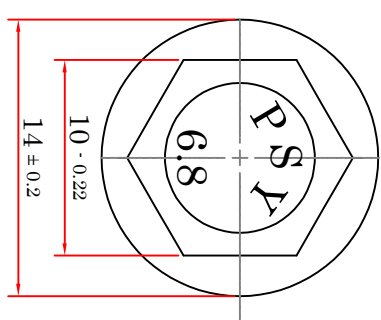


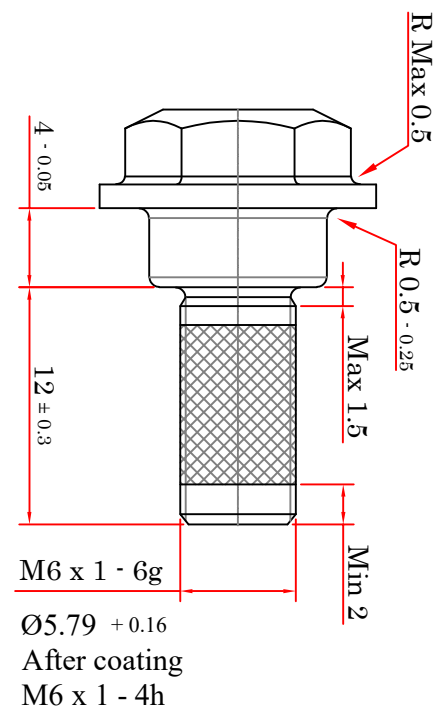

Scale : 2:1

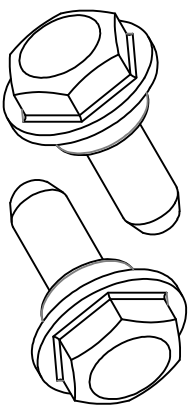

Scale : 1:1

- 1 - No flaking, blistering of the coating visible to the naked eye After being placed at a temperature of 300 degrees and cooling at a temperature of 20 degrees
- 2 - Purity of steel : Check the purity of steel in accordance with the standard NFA.04-106
- 3 - Prevailing torque for the first fixing : Max 0.8 N.m
- 4 - Prevailing torque for the first removal : Min 2.1 N.m
- 5 - Prevailing torque for the third removal : Min 0.6 N.m
- 6 - The depth of complete decarburization : Max 0.015 mm
- 7 - Depth of decarburization : Max 0.21 mm
- 8 - Coating thickness : Min 8µm
- 9 - F_m : 12070 - 16100 N
- 10-FN : 0.12 - 0.18

RE.VE:	DATE	---	NAME	---	Description	...
Standard List		Part NO	9613343480			 سپند پیچ یزد SEPAND PITCH CO.
Dimension	---	Part name	M6 x 1.0 x12			
Mechanical	C100020	DWG.NO DN9613343480/00				
Coating	B154102	---				
Tolerances	C100220	Drawn	B.Salehizade	01/05/29	Safety	☐
		Checked	S.Zabhi	01/05/29	Regularity	☐
Other Standard	B113110 - B141235	Confirmed	K.Farahmand 01/05/29 Unit : mm			☒
Customer Name :		SAPCO				