
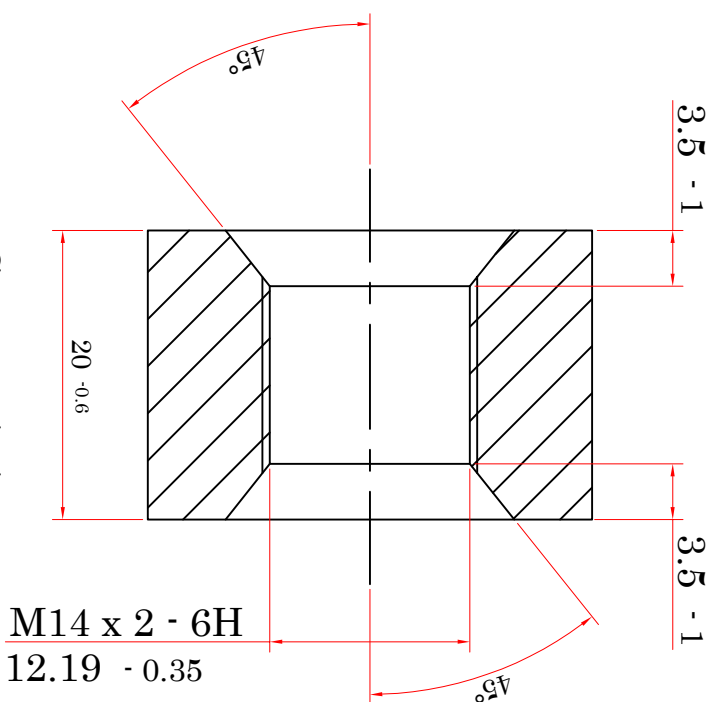


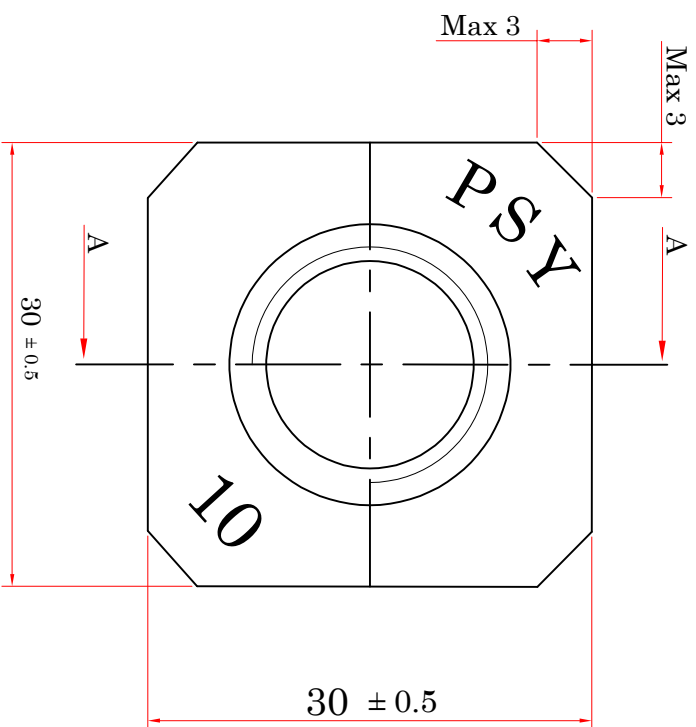

## Section A-A

FN: 0.12 - 0.18

Coating Thickness : Min 10  $\mu\text{m}$

Depth of decarburization :Max 0.30mm

Depth of complete decarburization :Max 0.015mm

Check the purity of steel in accordance with the standard NFA04-106

|                        |          |                              |                              |           |             |                                                                                     |                          |
|------------------------|----------|------------------------------|------------------------------|-----------|-------------|-------------------------------------------------------------------------------------|--------------------------|
| RE.VE2:                | DATA     | 03/06/25                     | NAME                         | S.Zabih   | Description | تغییر جنس محصول                                                                     |                          |
| RE.VE3:                | DATA     | 03/07/15                     | NAME                         | S.Zabih   | Description | اصلاح تراسس اجا خور                                                                 |                          |
| RE.VE4:                | DATA     | 03/10/02                     | NAME                         | M.Abdryan | Description | اصلاح تراسس ارتفاع مهره                                                             |                          |
| Standard List          |          | Part NO                      | 961 41 38580                 |           |             |  |                          |
| Dimension              | ---      | Part name                    | M1 4 x 2-6H-Square Nut       |           |             |                                                                                     |                          |
| Mechanical             | C20 0020 | DWG.NO                       | DN961 41 38580 /04           |           |             |                                                                                     |                          |
| Coating                | B15 4101 | ---                          | Name                         | Data      | Scale       |                                                                                     | 2:1                      |
| Tolerances             | ---      | Drawn                        | B.Salehzade                  | 00/11/27  | Safety      |                                                                                     | <input type="checkbox"/> |
| Other                  | ---      | Checked                      | M.Irandost                   | 00/11/27  | Regularity  | <input type="checkbox"/>                                                            |                          |
| Standard               | ---      | Confirmed                    | K.Farshmand                  | 00/11/27  | Unit : mm   |    |                          |
| SEPAND PITCH CO.       |          |                              |                              |           |             |  |                          |
| Machine                |          | 33BBS                        | Hardness (HV)                |           | 272-363     |                                                                                     |                          |
| Material               |          | 10B33 -10B21                 | Surface Hardness             |           | ---         |                                                                                     |                          |
| Dia.of Material        |          | 27.90                        | T.S (Mpa)                    |           | ---         |                                                                                     |                          |
| diameter blank         |          | ---                          | Y.S (Mpa)                    |           | ---         |                                                                                     |                          |
| length blank           |          | ---                          | Proof Load (N)               |           | 115440      |                                                                                     |                          |
| Weight                 |          | 116.20 gr                    | Non Destructive Torque (N.m) |           | ---         |                                                                                     |                          |
| Rod Production process |          | PASAP                        | Type Coating                 |           | Z5FJR       |                                                                                     |                          |
| Quality Class          |          | 10                           | Color                        |           | Golden      |                                                                                     |                          |
| Coating                |          | Coromate                     | Salt Spray To Sediment Red   |           | ---         |                                                                                     |                          |
| Customer Name :        |          | Salt Spray To Sediment White |                              | Min 200 h |             |                                                                                     |                          |
| SAPCO                  |          |                              |                              |           |             |                                                                                     |                          |