
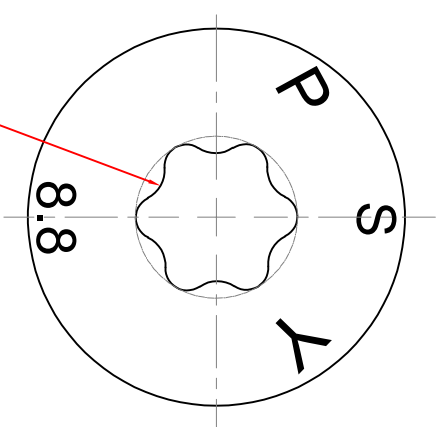


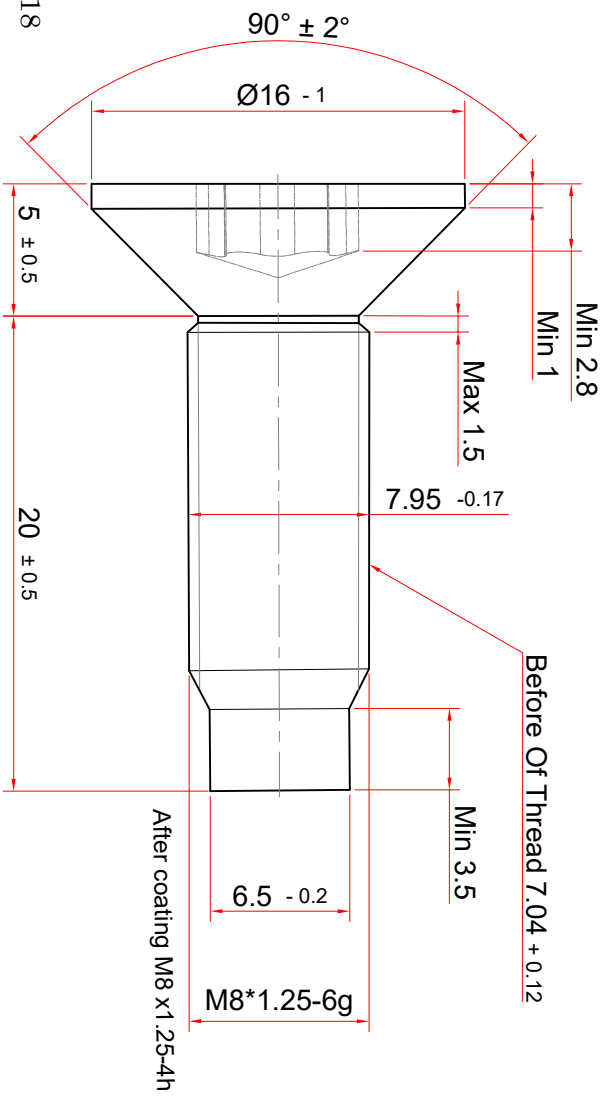


- 1- FN : 0.12- 0.18
- 2- F_m : 29290- 36610 N
- 3- Coating Mass : 24 gr/m²
- 4- Coating thickness : Min 6 μm
- 5- Depth of decarburization : Max 0.25 mm
- 6- Depth of complete decarburization : Max 0.015 mm
- 7- Grip of coating : no separated particulate < 1mm²
- 8- Check the purity of steel in accordance with the standard NFA04-106
- 9- Structure before tempering : structure with more than 90%martensite at the centre in the hardened state

Recess With six internal Lobes

No.40(C100140)

Torx T40



Scale: 1:1

RE.VE:1	DATE	1403/04/23	NAME	M.Abdalyan	Description	افغانستان کړن جوړم وچسټنکي پوښښ وسټاښتوړوخصوص فسرولا ودرج روش کسټرول انچر خور
Standard List		Part NO	IK01326380			
Dimension	---	Part name	M8 x 1.25 x 25-6g			
Mechanical	C10 0020	DWG.NO	DNIK01326380/01			
Coating	B15 3320	---	Name	Data	Scale	3/1
Tolerances		Drawn	B.Salehzade	00/08/08	Safety	☐
Other		Checked	M.Irandost	00/08/08	Regularity	☐
Standard	B11 3110	Confirmed	K.Farahmand	00/08/08	Unit : mm	
سپند پیچ یزد 10- SEPAND PITCH CO.						
Machine		83S	Core Hardness(HV)		250-320 (22-32 HRC)	
Material		10B21/ 10B38	Surface Hardness		---	
Dia.of Material		8mm	T.S (Mpa)		800-1000	
diameter blank		6.95mm	Y.S (Mpa)		640-900	
length blank		32.9mm	Proof Load		---	
Weight		10 gr	EL (%)		Min 12%	
Rod Production process		PASAP	Type Coating		ZLYMGL	
			Color		Silver gray	
Quality Class		8.8	Salt Spray To Sediment Red		Min 600h	
Coating		Zinc Flake	Salt Spray To Sediment White		---	
Customer Name :		SAPCO				