
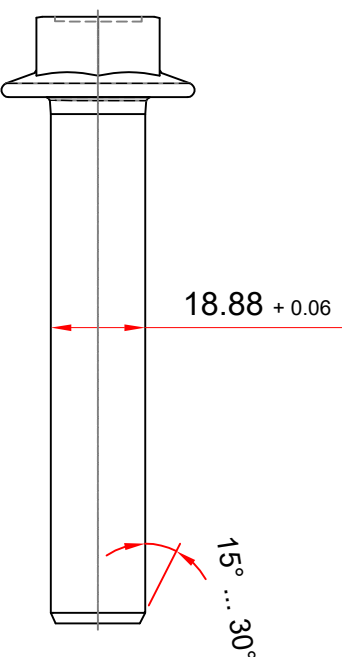
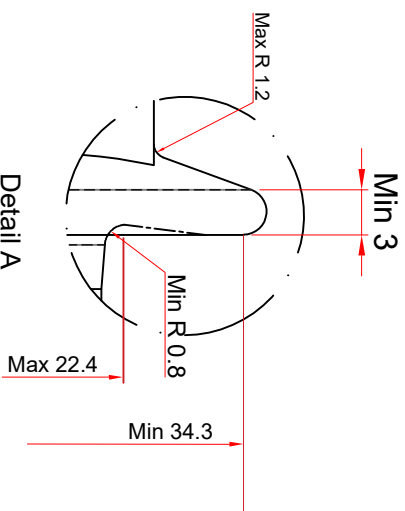
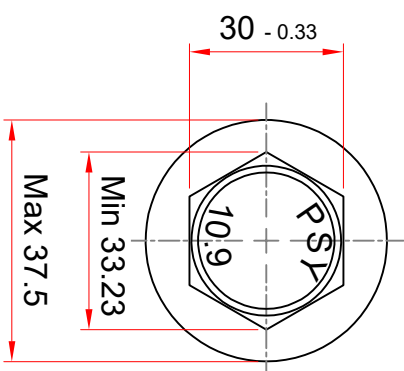


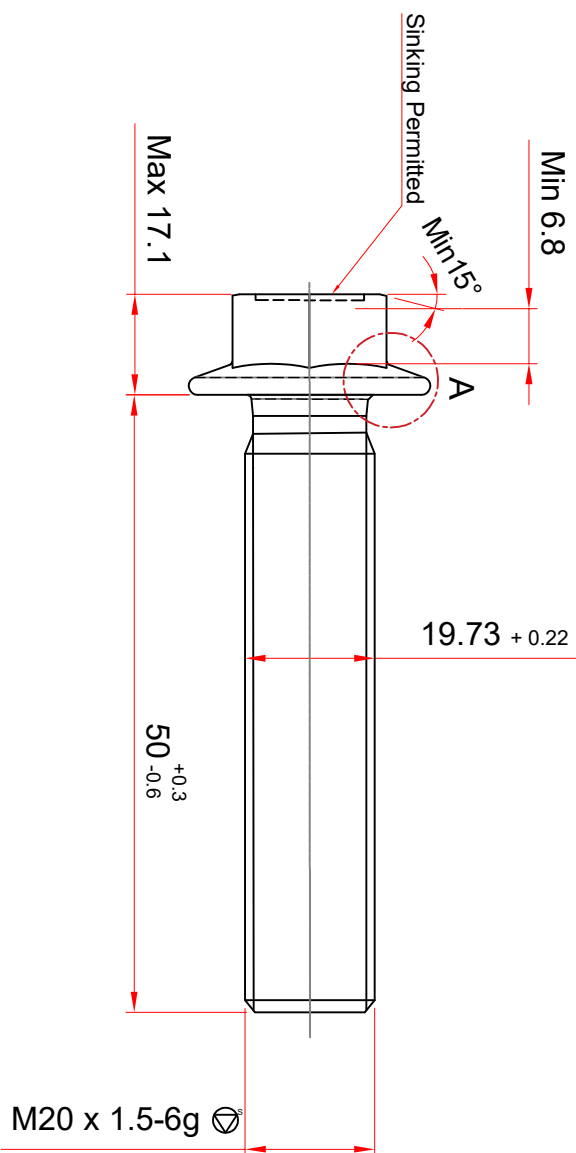

- 1: Depth of complete decarburization : Max 0.015mm
- 2: Depth of decarburization : Max 0.3mm
- 3: Coating mass : Min 24gr/m²
- 4: Coating thickness : Min 6µm

RE.VE:	DATA	---	NAME	---	Description	---
Standard List						
Dimension	MBN 10105	Part NO	IZ0049901604			
Mechanical	ISO 898-1	DWG.NO	DNIZ0049901604/00			
Coating	DBL9440	---	Name	Data	Scale	1:1
Tolerances	ISO 4759	Drawn	M.Zolfaghari	02/05/11	Safety	■
Other Standard	---	Checked	S.Zabih	02/05/11	Regularity	□
		Confirmed	K.Farahmand	02/05/11	Unit : mm	⊕
 سپند پیتچ SEPAD PITCH CO.						
Customer Name : Iran Khodro Diesel						
Machine	305L	Core Hardness(HRC)				
Material	10B38 	Surface Hardness(HV)				
Dia. of Material	21-22	T.S (Mpa)				
diameter blank	19.60	Y.S (Mpa)				
length blank	---	Proof Load(N)				
Weight	---	EL (%)				
Red Production process	PASAP	Type Coating				
Quality Class	10.9	Color				
Coating	Diomeel	Salt Spray T o Sediment Withg				
		Silver gray				
		Min 500h				
