
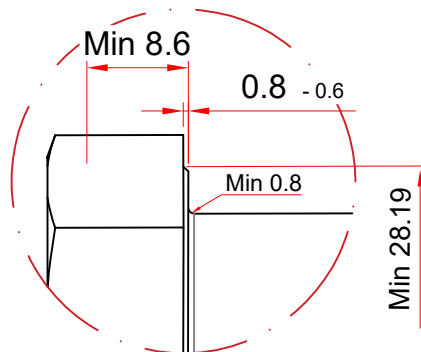


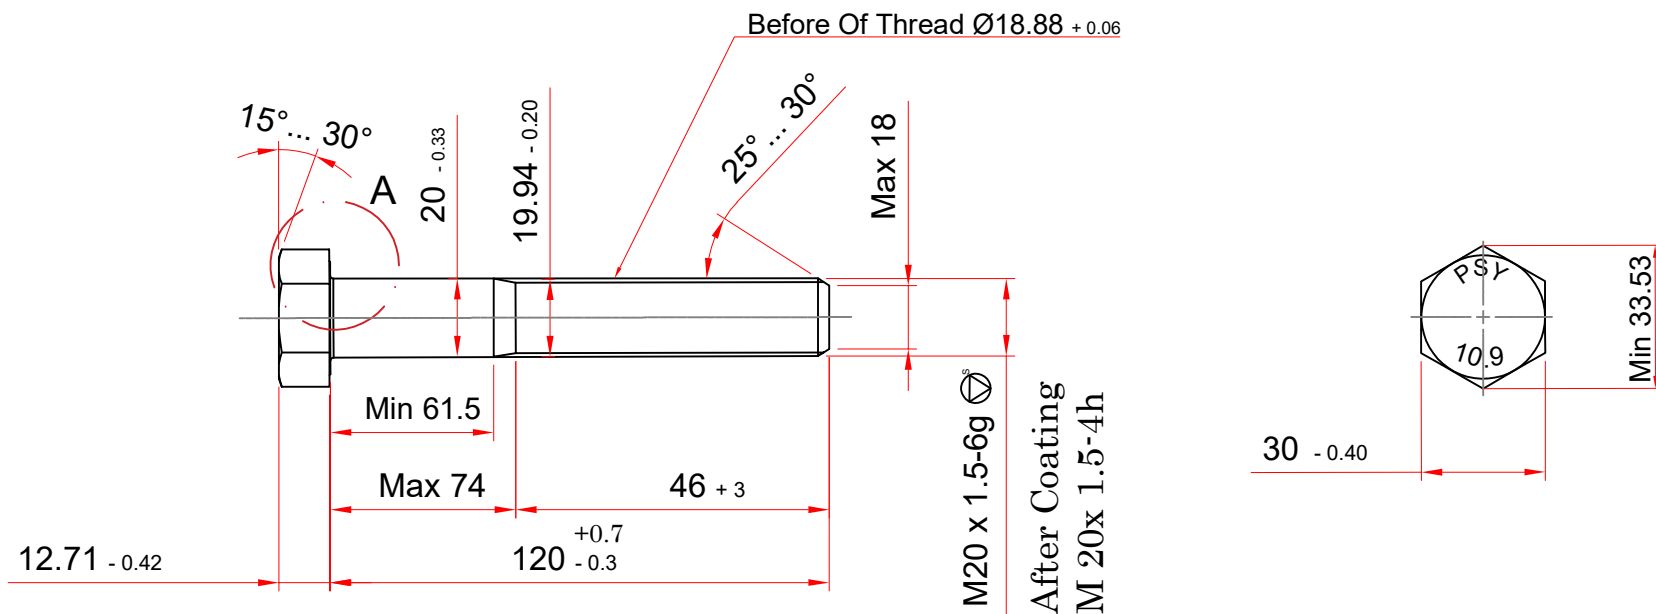

Detail A

- 1: Depth of complete decarburization : Max 0.015mm
- 2: Depth of decarburization : Max 0.3mm
- 3: Coating mass : Min 24gr/m²
- 4: Coating thickness : Min 6µm

RE.VE:	DATA	1401/09/22	NAME	S.Zabihi	Description	تغییر طول کلی مطابق درخواست مشتری	Machine	CBP305I	Core Hardness(HRC)	32-39	
RE.VE:	DATA	1402/05/19	NAME	S.Zabihi	Description	افزودن پارامترهای ایمنی	Material	10B38SCM435	Surface Hardness(HV)	Max 390	
Standard List		Part NO	IZ11056124				 سپند پیچ یزد	Dia.of Material(mm)	22	T.S (Mpa)	Min 1040
Dimension	ISO 8765 : 2011	Part name	M20x1.5x120					diameter blank(mm)	19.60	Y.S (Mpa)	Min 960
Mechanical	---	DWG.NO	DNIZ11056124/00/02					length blank(mm)	158.13	Proof Load	---
Coating	---	---	Name	Data	Scale			Weight(gr)	351	EL (%)	Min 9 %
Tolerances	---	Drawn	B.Salehizade	00.06.25	Safety	■		Production process Wire Rod	SAIP2	Type Coating	---
		Cheked	M.Irandost	00.06.25	Regularity	□			Color	Silver	
Other Standard	---	Confirmed	K.Farahmand	00.06.25	Unit : mm	⌀	Quality Class	10.9	Salt Spray To Sediment Red	Min 500h	
							Coating	Dacromet	Salt Spray To Sediment Withe	---	
							Customer Name :		Iran Khodro Diesel		