
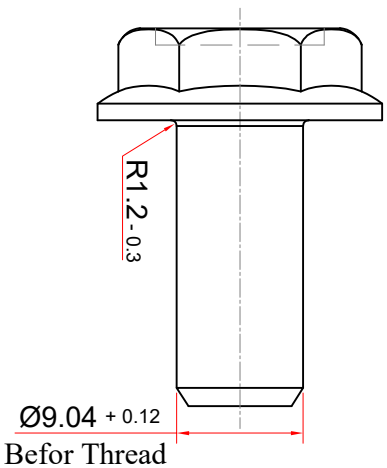
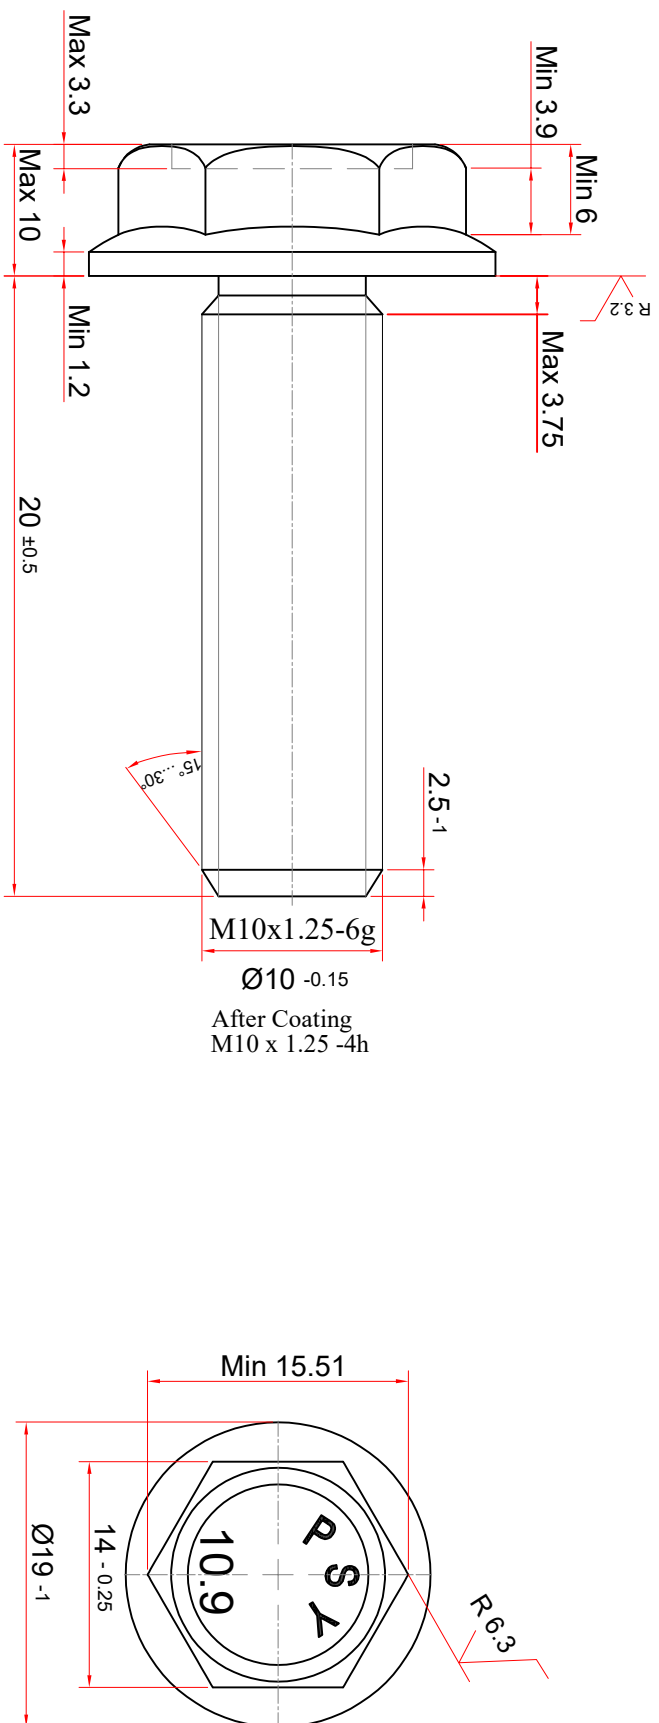


Scale: 1:6:1

- 1- Coating thickness : Min 6µm
- 2- Depth of decarburization : Max 0.25mm
- 3- Depth of complete decarburization : Max 0.015mm

RE.VE:	DATE	---	NAME	---	Description	----	
Standard List						 سپند پیچ یزد SEPAND PITCH CO.	
Dimension	KES E-A007B	Part NO	K99784-1020N				
Mechanical	KES C-C001	Part name	M10x1.25x20-4h				
Coating	KES C-F003B	DWG.NO	DNK997841020N/00				
Tolerances	---	---	Name	Data	Scale		2.4:1
Other Standard	---	Confirmed	Drawn	M.Abadyan	03/07/29	Safety	☐
			Cheked	S.Zabhi	03/07/29	Regularity	☐
			Mh.Abaei	03/07/29	Unit : mm		
 سپند پیچ یزد SEPAND PITCH CO.							
Machine		105SA	Core Hardness(HRC)		31-39		
Material		10B38	Surface Hardness(HV)		Max 402		
Dia.of Material diameter blank		12/11	T.S (Mpa)		Min1000		
length blank		9.60	Y.S (Mpa)		Min 900		
Weight		---	Proof Load (Mpa)		---		
Rod Production process		SAIP2	EL (%)		Min 9%		
Quality Class		10T	Type Coating		Geomet 500A		
Coating		Dacromet	Color		Silver gray		
Customer Name :		Salt Spray To Sediment Red		Min 480h			
		Salt Spray To Sediment White		---			
Mega Motor/Behran Motor							

پیچ اتصال دنده تایمینگ به میل پادامک