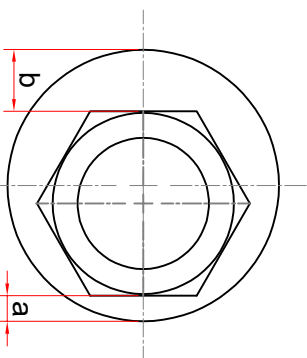
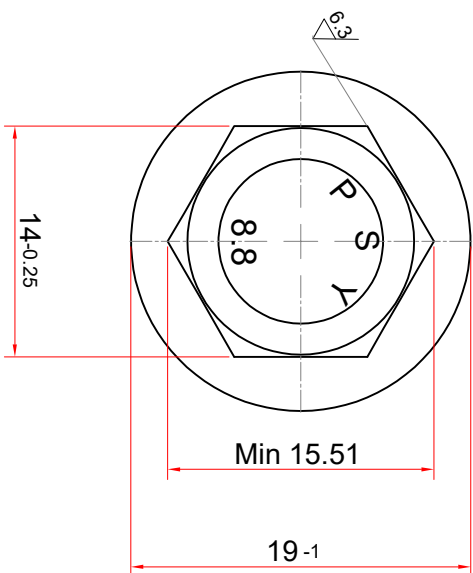




$$b-a = \text{Max } 0.5$$


Scale:1.2:1

RE.VE:1	DATE	1402/02/23	NAME	B.SalehiZade	Description	افزون قطر قیل و بعد رزوه مشکله کردن براگوشه ها، جفت پوشش رنگ دورکاری چربی و گلگی وانگوشدن علامت حساسی سطح		
RE.VE:2	DATE	1403/04/24	NAME	M.Abadian	Description			
Standard List		Part NO	K99794-1020					
Dimension	KES E-A007	Part name	M10 x 1.25 x 20					
Mechanical	KES C-C001	DWG.NO	DNK99794-1020/02					
Coating	KES C-F002	---		Name	Data	Scale	Safety	2:1
Tolerances	FREE TOL : DIN 7168	Drawn	s.zabih	00/09/29	Regularity	☐		
Other Standard	---	Checked	M.Irandost	00/09/29	Regularity	☐		
		Confirmed	K.F.Farahmand	00/09/29	Unit :	mm		
 سپند پیچ یزد SEPAND PITCH CO.								
		Machine	---	Core Hardness(HRC)		20-30		
		Material	10B21	Surface Hardness(HV)		Max 320		
		Dia.of Material	---	T.S (Mpa)		Min 800		
		diameter blank	---	Y.S (Mpa)		Min 640		
		length blank	---	Proof Load		---		
		Weight	33 gr	EL (%)		Min 12%		
		Rod Production process	SAP2	Type Coating	MFZnTi-C Golden			
		Quality Class	8.8	Salt Spray To Sediment Red		Min 120h		
		Coating	chromate	Salt Spray To Sediment Withe		Min 72h		
		Customer Name :		Mega Motor				