



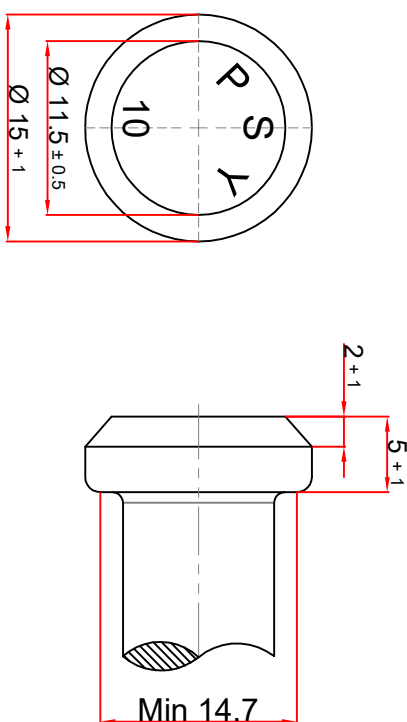

- 1-Dimensional sorting of the whole screw.
- 2-Sorting the mechanical properties of the whole screw.
- 3-Depth of complete decarburization : Max 0.015 mm

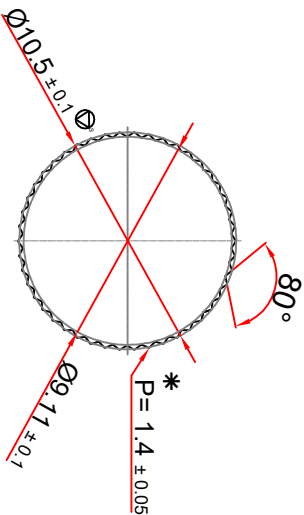

Machine	104-105	Quality Class	10 T
Material	10B38/SCM435	Core Hardness (HRC)	30-38
Dia of Material	12 mm	Surface Hardness (HV)	---
Diameter Blank	9.60 mm	T.S (Mpa)	Min 1000
Length Blank	---	Y.S (Mpa)	Min 900
Weight (gr)	---	Proofload (Mpa)	
Wire Productions Process	SAIP 2	EL (%)	Min 9
Coating	Dacromate	T type Coating	DMF2
		Color	Silver Garay
Salt Spray To Sediment White			
Salt Spray To Sediment Red			
			Min 480 hr
Customer name:	Mega Motor		