


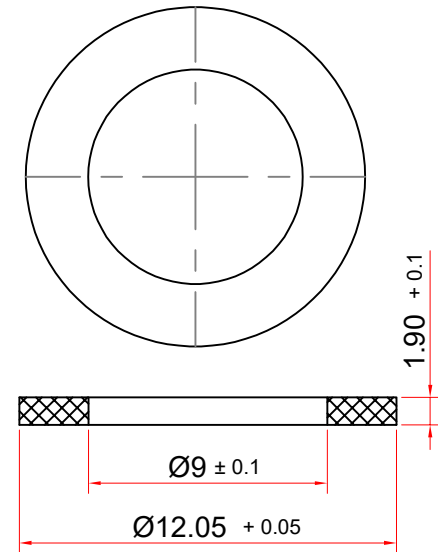
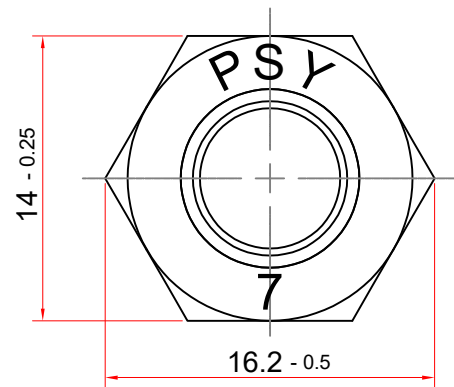


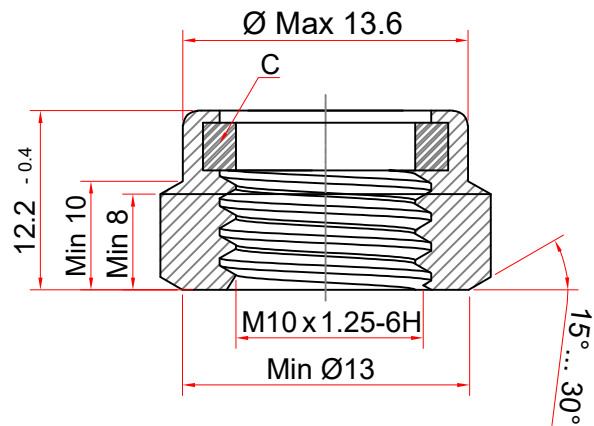



Eccentricity of thread hole




Slope of bearing surface



Slop of sides

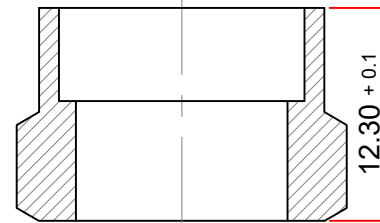

C: Prevailing Torque Element

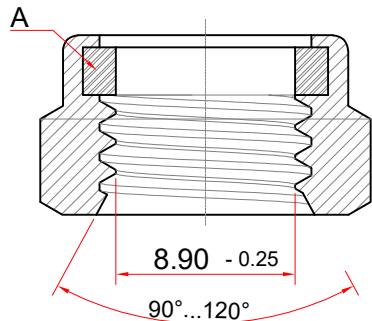

Scale : 2 : 1

Prevailing torque First fixing :Max 9.71 N.m

Prevailing torque First removal :Min 1.4 N.m

Prevailing torque Fifth removal :Min 1 N.m

Coating thickness : Min 8µm

عدم وجود پلیسه، برآمدگی و یا فرورفتگی و خراش بر روی مهره

RE.VE:	DATE	1402/05/14	NAME	M.Zolfaghari	Description	افزودن ابعاد پرس	Machine	17B6S	Core Hardness	70HRB-28 HRC		
RE.VE:	DATE	1402/09/22	NAME	S.Zabihi	Description	افزودن گشتاور قسمت قفلی	Material	10B21/10B38	Surface Hardness	---		
Standard List		Part NO		089123401A				Dia.of Material	---	T.S (Mpa)	---	
Dimension	NES D2217	Part name		M10*1.25-6H				diameter blank	---	Proof Load (Mpa)	686	
Mechanical	NES D2217	DWG.NO		DN089123401A/02				length blank	---	Proof Load(N)	---	
Coating	NES-M4040	---		Name	Data	Scale		2:1	Weight	---	EL (%)	---
Tolerances	DIN 7168m	Drawn		M.Zolfaghari	02/01/17	Safety		☐	Rod Production process	PASAIP	Type Coating	MFZN8C
		Cheked		S.Zabihi	02/01/17	Regularity	☐	Quality Class	7N	Salt Spray To Sediment Red	192h	
Other Standard	---	Confirmed		K.Farahmand	02/01/17	Unit : mm		Coating	Chromate	Salt Spray To Sediment Withe	72h	
SEPAND PITCH CO.								Customer Name :		Saze gostar		