
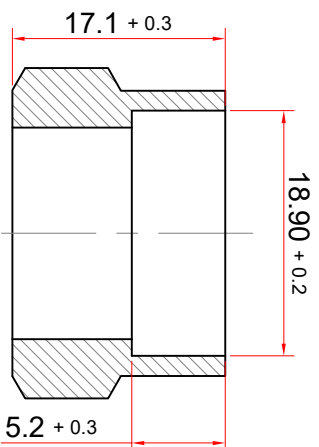


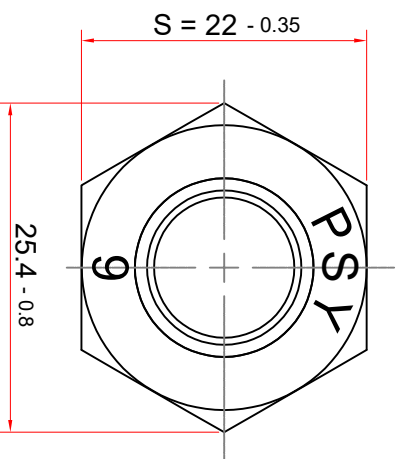

Slop of sides

1° Max

عدم وجود پلیس، برآمدگی ویا
فرو رفتگی و خراش بر روی مهره

Prevailing torque First fixing :Max 24 N.m
Prevailing torque First removal :Min 3.3 N.m
Prevailing torque Fifth removal :Min 2.3 N.m
Coating thickness : Min 8µm

Scale: 1.9:1