

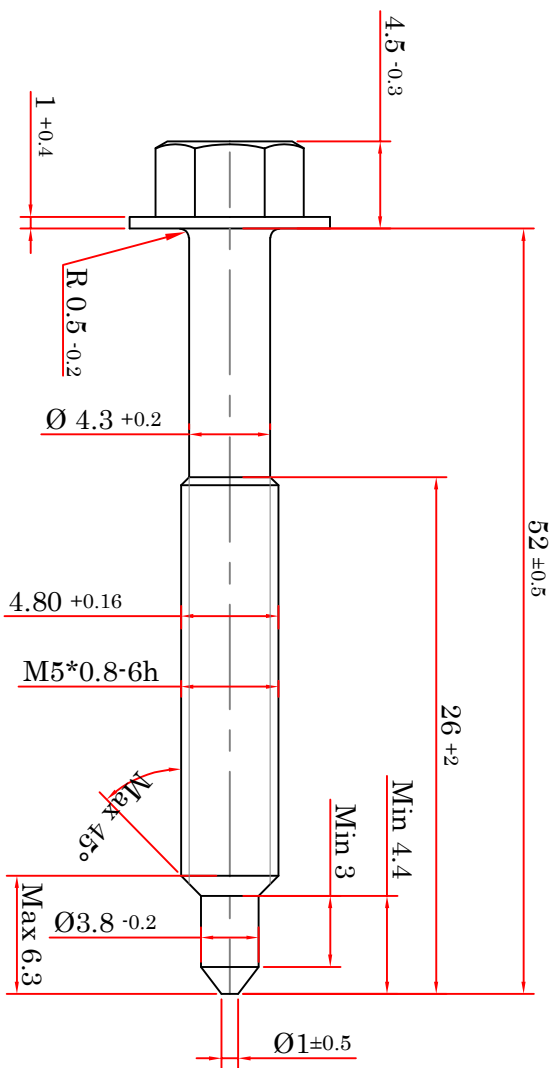

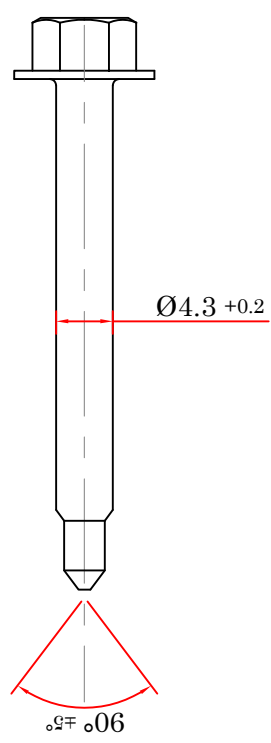





After Coating M5 x 0.8 - 6h
 Befor Coating M5 x 0.8 - 6g



Dia. Before Thread Rolling

Coating thickness : Min 8 μ m

RE.VE:1	DATE	1400/01/24	NAME	S.Zabih	Description	تغییر ارتفاع کله پیچ و اضافه کردن کلاس فنی و ویرایش شماره فنی
RE.VE:2	DATE	1403/05/29	NAME	M.abadiyan	Description	
Standard List	Part NO	10208073	Part name	M5*0.8*52-6h		
Dimension	---					
Mechanical	ISO 898-1:2013	DWG.NO	DN10208073/ 02			
Coating	---		Name	Data	Scale	2:1
Tolerances	FREE TOL : DIN 7168		Drawn	s.zabih	Safety	☐
Other	---		Checked	M.Irandost	Regularity	☐
Standard	---		Confirmed	K.Farahmand	Unit : mm	☒
سپند پیچ یزد SEPAND PITCH CO.						
Machine	---		Core Hardness(HRC)	32-39		
Material	10B21/10B38		Surface Hardness(HV)	390		
Dia.of Material	---		T.S (Mpa)	Min 1040		
diameter blank	---		Y.S (Mpa)	Min 960		
length blank	---		Proof Load	---		
Weight	7.80		EL (%)	Min 9%		
Rod Production process	SAIP2		Type Coating	---		
Quality Class	10.9		Color	White		
Coating	Coromate		Salt Spray To Sediment Red	Min 72h		
Customer Name :	استان صنعت					