

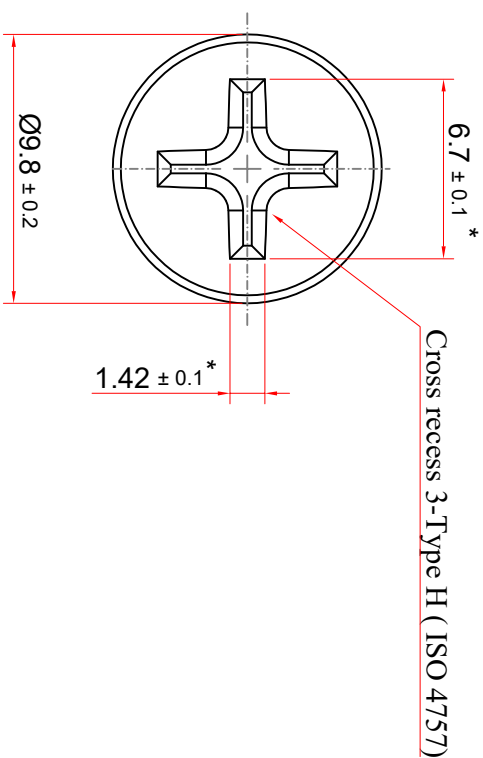


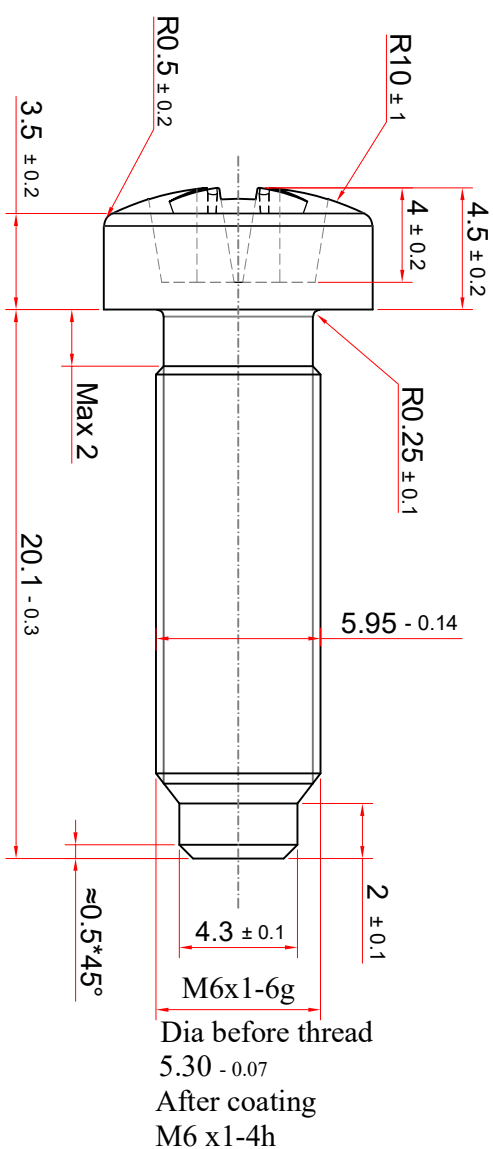

Cross recess 3-Type H (ISO 4757)

Coating thickness :Min 10µm

* The gauge should act correctly on the screw head.

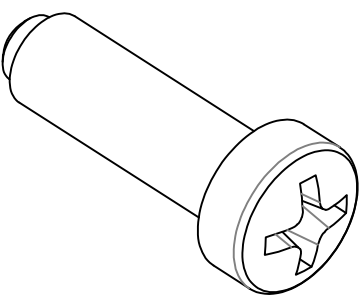

RE.VE:1	DATE	03/08/28	NAME	M.abadiyan	Description	بسیارنگری نقشه و اصلاح کلاس فنی
Standard List		Part NO	107735			
Dimension	ISO 7045	Part name	M6x1x20-6g			
Mechanical	---	DWG.NO	DN107735/01			
Coating	PSA B15 4101	---	Name	Data	Scale	3:1
Tolerances	DIN 7168	Drawn	B.Salehizade	02/08/17	Safety	☐
Other	---	Checked	S.Zabhi	02/08/17	Regularity	☐
Standard	---	Confirmed	K.Farahmand	02/08/17	Unit : mm	☒
 سپند پیچ یزد SEPAND PITCH CO.						
Customer Name :		کابل خودرو سبز وار				
Machine	---	Core Hardness (HV)	172-253			
Material	1022/1018/1015	Surface Hardness(HV)	---			
Dia.of Material	---	T.S (Mpa)	550-600			
diameter blank	---	Y.S (Mpa)	Min 480			
length blank	---	Proof Load (N)	---			
Weight	---	EL (%)	---			
Production process Wire Rod	SAIP1	Type Coating	Z10FB			
Quality Class	6.8	Salt Spray To Sediment Red	---			
Coating	ChromateSalt Spray To Sediment White	Min 200 h	---			