
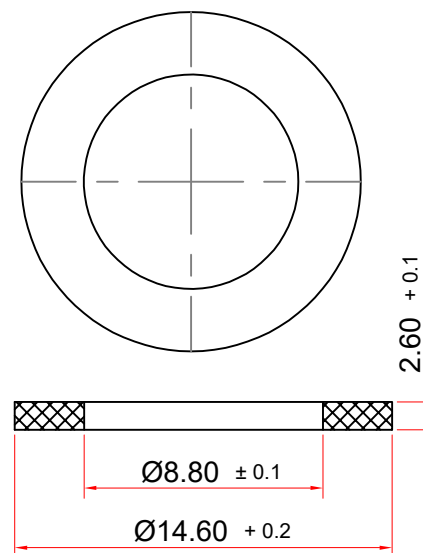


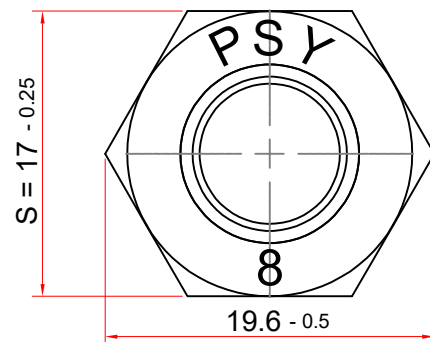


C: Prevailing Torque Element

A - B ≤ 0.5

1° Max

for Press

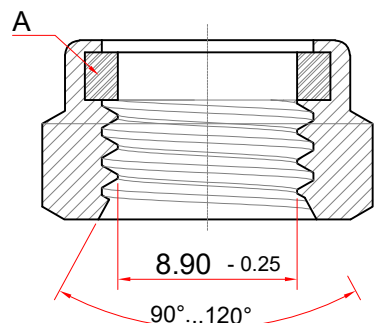

Scale : 1.9 : 1

عدم وجود پلیسه، برآمدگی و یا فرورفتگی و خراش بر روی مهره

Prevailing torque

First fixing : Max 10.5N.m

First removal : Min 1.5N.m

Fifth removal : Min 1N.m

Coating thickness : Min 8μm

RE.VE:	DATA		NAME		Description		Machine	19B6S	Core Hardness(HV)	188 - 302
Standard List							Material	10B21	Surface Hardness	---
							Dia.of Material	---	T.S (Mpa)	---
Dimension	---	Part name	M10*1.25-6H				diameter blank	16.1	Proof Load (Mpa)	830
Mechanical	NES-D2210	DWG.NO	DN48366B0700/00				length blank	---	Proof Load(N)	---
Coating	NES-M4040	---	Name	Data	Scale	2:1	Weight	---	EL (%)	---
Tolerances	DIN 7168m	Drawn	M.Zolfaghari	01/12/03	Safety	☐	Rod Production process	PASAIP	Type Coating	MFZN8C
Other Standard	---	Cheked	S.Zabihi	01/12/03	Regularity	☐	Quality Class	8	Color	Yellow
SEPAND PITCH CO.							Coating	Chromate	Salt Spray To Sediment Withe	Min 192h
							Customer Name :		Saze gostar	