
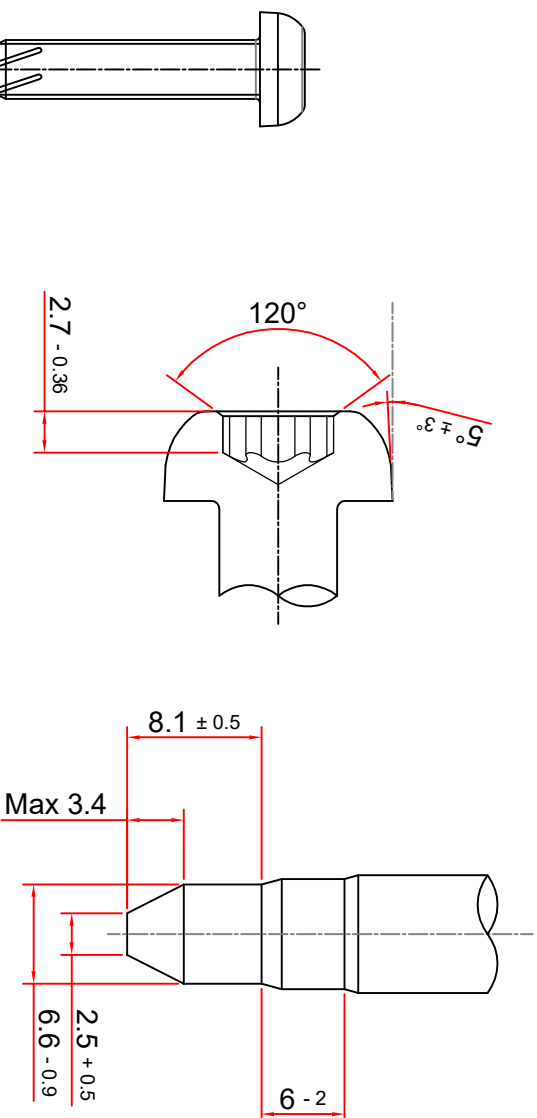
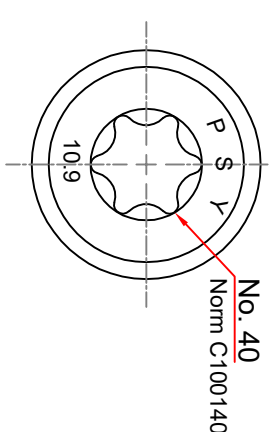


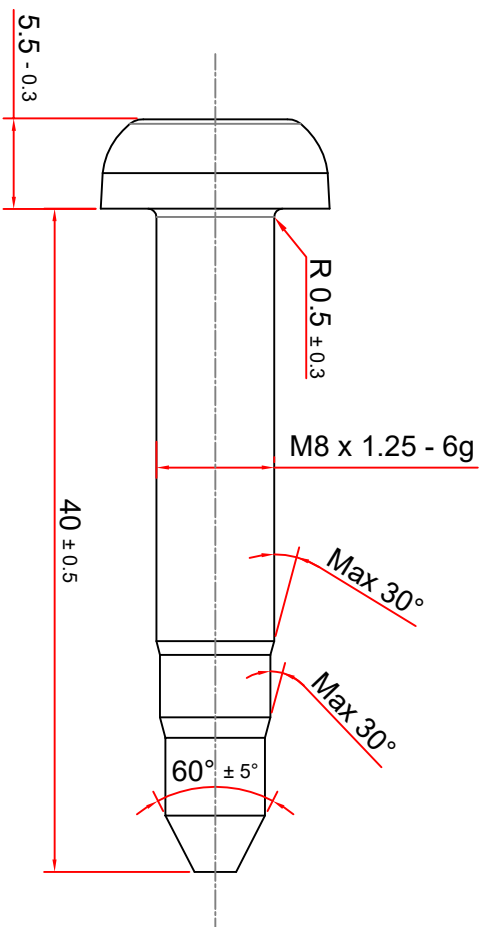

SCALE : 1:1

Check the purity of steel in accordance with the standard NFA04-106

FN : 0.12 - 018.

Six equidistance decolorizer (paint remover)

The depth of complete decarburization : Max 0.015 mm

The depth of total decarburization : Max 0.25 mm

Thickness : Min 10 µm

Ultimate Tensile strength : 36610 ~ 43930 N

RE.VE:	DATA	---	NAME	---	Description	---
Standard List		Part NO	7903025018-E			
Dimension	C912522	Part name	M8 x 1.25 x 40			
Mechanical	C100020	DWG.NO	DN7903025018-E/00			
Coating	B154101	---	Name	Data	Scale	2:1
Tolerances	---	Drawn	B.Salehizade	01/04/12	Safety	☐
Other Standard	C100085	Checked	S.Zabih	01/04/12	Regularity	☐
	Confirmed	K.Farahmand	01/04/12	Unit : mm		
 سپند پیچ یزد SEPAND PITCH CO.						
Machine		---	Core Hardness(HRC)		32-39	
Material		10B38 SCM435	Surface Hardness (HV5)		Max 410	
Dia of Material		---	T.S (Mpa)		1000-1200	
diameter blank		---	Y.S (Mpa)		900-1080	
length blank		---	Proof Load		---	
Weight		---	EL (%)		Min 9%	
Rod Production process		PASAIP	Type Coating		Z5DFJR	
Quality Class		10.9	Color		Golden	
Coating		Coronate	Salt Spray To Sediment Withe		Min 500h	
Customer Name :		مهر کام پارس				