




Max 7.4**

0.6 -0.45

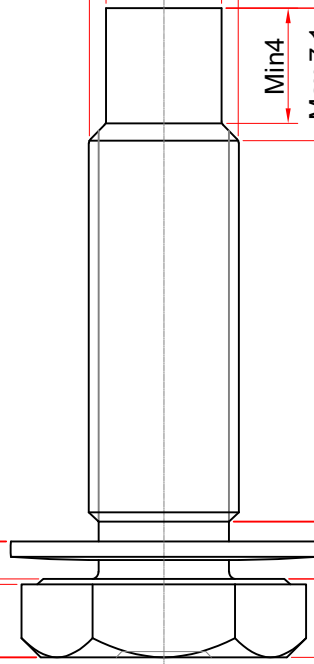

3.85 ± 0.15

Max 1.5P

30 ± 0.5

Max 7.1



Min 4

Ø 5.9 ± 0.2

M8 x 1.25 - 6g


After Thread Ø 7.95 - 0.17

After Coating M8 x 1.25 - 4h

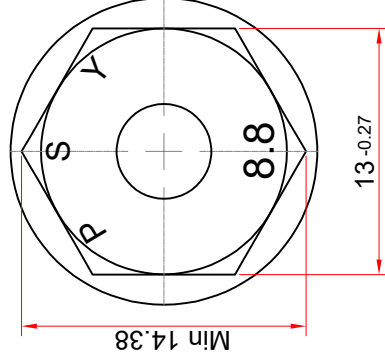


Material : CK67-CK75
PSA C225880

Dia. Before Thread Ø 7.06 ± 0.08

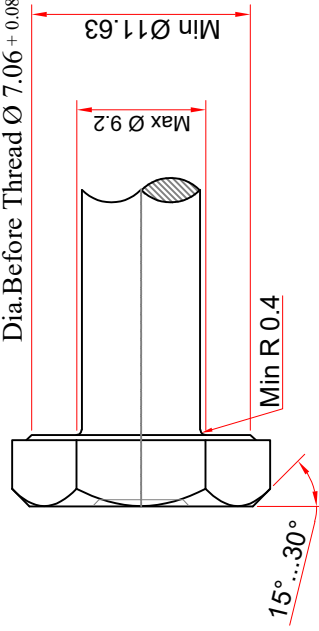

Coating thickness : Min 6µm

****** Practical dimensions valid for washers, under load
its valid when the bolt assembled and should not be measured



SCALE

Re.Ve1	DATE	1403/10/29	Name	M.Abdian	Description	افزون اندازه زیر وشر تا رزه و اندازه بالای کله پیچ تا زیر وشر	Machine	84	Quality Class	8.8
Re.Ve2	DATE	---	Name	---	Description	---	Material	10B21-10B38	Core Hardness (HRC)	22 - 32
Re.Ve3	DATE	---	Name	---	Description	---	Dia.of Material	9mm	Surface Hardness (HV)	---
Feasibility Number :	1403-058	Assembly location:	پیچ سرش گوش راهنما	Part NO:	9159527480	9159527480	Diameter Blank	7.6mm	T.S (Mpa)	Min 800
Standard List		Part Name:	Part Name:	Part Name:	M8x1.25x30	M8x1.25x30	Length Blank	40-41mm	Y.S (Mpa)	Min 640
Demension	C120170	DWG.No:	DWG.No:	DWG.No:	DN9159527480/01	DN9159527480/01	Weight (gr)	13.90-14 gr	Proofload (Mpa)	---
Mechanical	ISO 898-1	Name	Name	Date	Scale	3: 1	Wire Productions Process	SAIP 2	EL(%)	Min 12
Coating	PSA B15 3320	Drawn	M.Abdian	1403/07/16	Safety	□	Coating	Zinc Flake	Type Coating	Geomet 500A
Tolerances	DIN 7168	Choked	S.zabih	1403/07/16	Regularity	□	Salt Spray To Sediment White			Silver Gray
Other Standard	---	Confirmed	Mh.Abaei	1403/07/16	Unit : mm	☉	Salt Spray To Sediment Red			Min600 h
Customer name:							طوبی آرایش			