

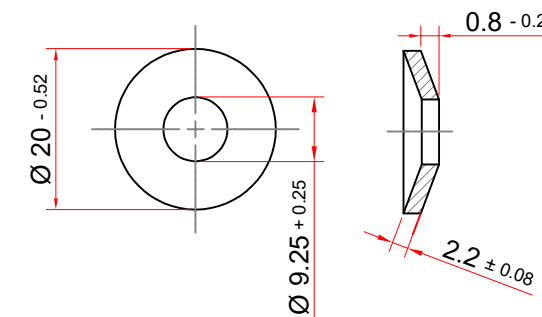
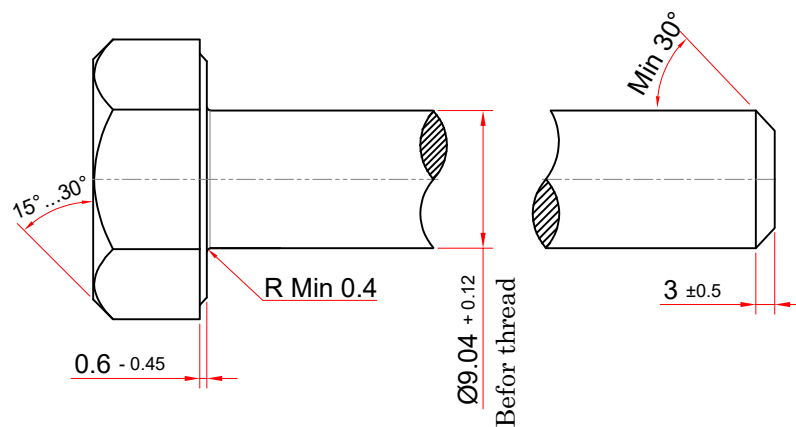


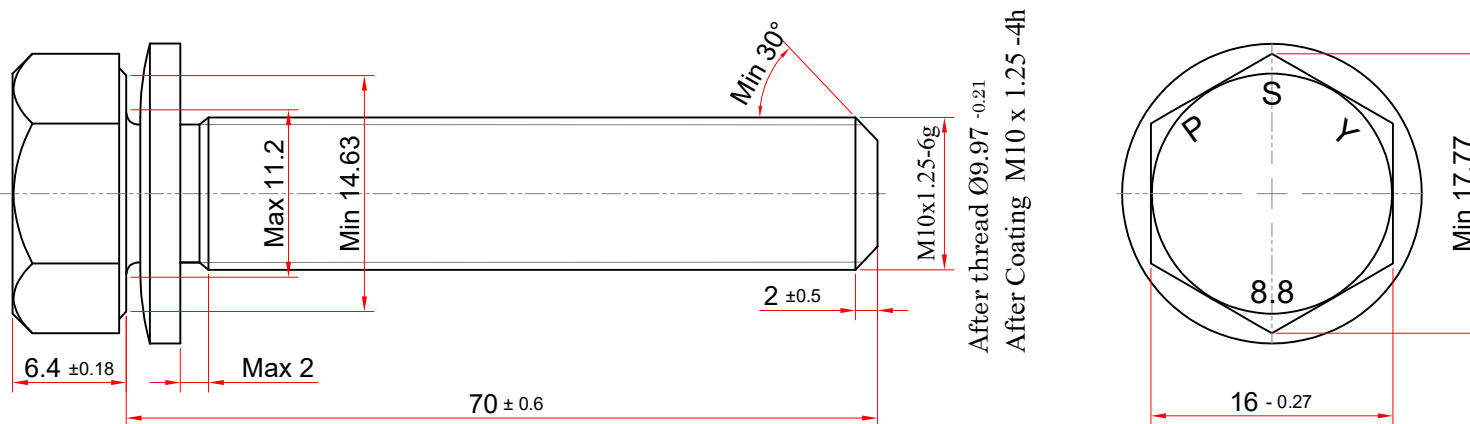

Material : CK67-CK75
PSA C225880



Scale 1:1

Surface Area : 4571.25 mm²
Coating thickness : Min 6 µm

RE.VE:1	DATE	03/12/15	NAME	S.Abbasi	Description	اصلاح کیفیت سطح و استفاده و افزودن مساحت سطح		Material	10B21-10B38	Quality Class	8.8	
RE.VE:2	DATE	---	NAME	---	Description			Dia of Wire	12mm	Core Hardness(HRC)	22-32	
RE.VE:3	DATE	---	NAME	---	Description	---		Weight (gr) ≈	...	Surface Hardness(HV)	Max 350	
Feasibility Number :		1403-055	Assembly Location		پیچ سر شش گوش			Wire Production process	SAIP1/SAIP2	Tensile Strength (Mpa)	Min 800	
Reference Standard Are As Below :			Part NO		9622028280			Coating	Zink Flake	Yield Strength (Mpa)	Min 640	
Dimension		C-12-0150	Part name		M10x1.25x70			Coating Type	Geomet 500A	Proof Load(N)	---	
Mechanical		C100020	DWG.NO		DN9622028280/01			Chromate Color	Silver Gray	EL (%)	Min 12	
Coating		---		Name	Data	Scale	1.5:1		Resistance to Slat Spray		White Rust	Min ...hr
Tolerances		---		Drawn	M.Abadian	1403/07/05	Safety				☐	Red Rust
				Checked	S.Zabihi	1403/07/05	Regularity		☐			
Other Standard		---	Confirmed	M.Abaei	1403/07/05	Unit : mm		SEPAD PITCH CO.	Customer Name	طوبی آرایش		