


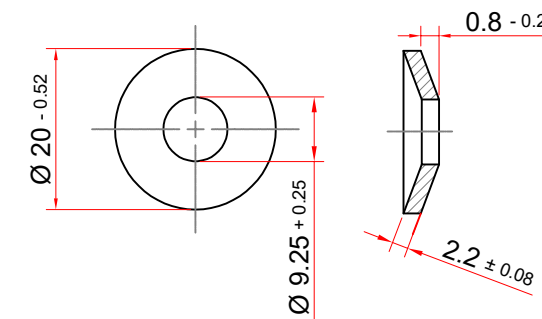
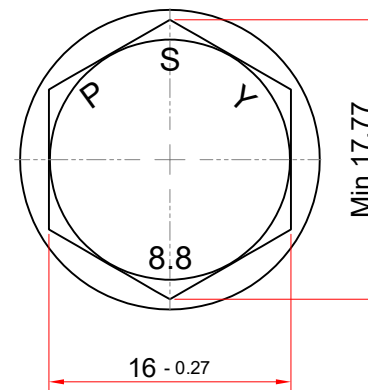


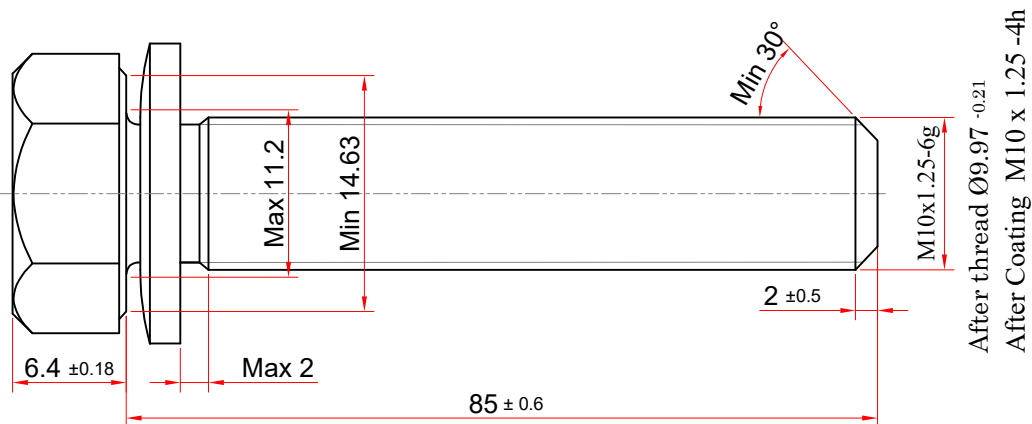

Material : CK67-CK75
PSA C225880



Scale 1:1

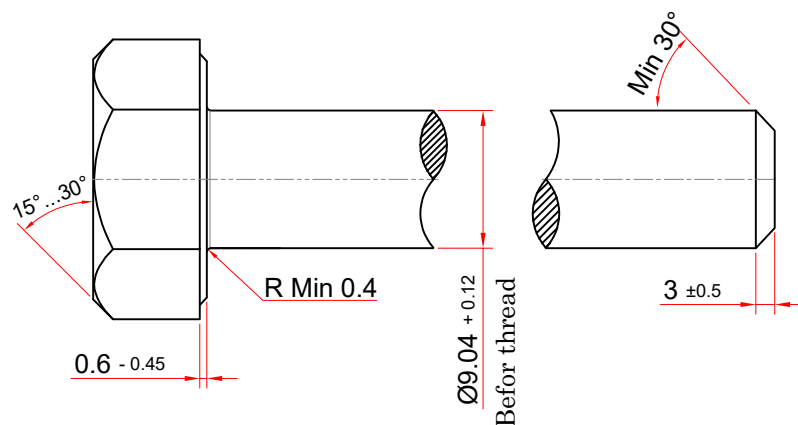

Surface Area : 5281.43 mm²
Coating thickness : Min 6 µm

RE.VE:1	DATE	03/12/15	NAME	S.Abbasi	Description	اصلاح ششپوت مسخنی سطح و استاندارد و افزودن مساحت سطح		Material	10B21-10B38	Quality Class	8.8		
RE.VE:2	DATE	---	NAME	---	Description			Dia of Wire	12mm	Core Hardness(HRC)	22-32		
RE.VE:3	DATE	---	NAME	---	Description	---		Weight (gr) ≈	...	Surface Hardness(Hv)	Max 350		
Feasibility Number :		1403-055	Assembly Location		پیچ سر شش گوش			Wire Production process	SAIP1/SAIP2	Tensile Strength (Mpa)	Min 800		
Reference Standard Are As Below :			Part NO		9622028480			Coating	Zink Flake	Yield Strength (Mpa)	Min 640		
Dimension		C-12-0150	Part name		M10x1.25x85			Coating Type	Geomet 500A	Proof Load(N)	---		
Mechanical		C100020	DWG.NO		DN9622028480/01			Chromate Color	Silver Gray	EL (%)	Min 12		
Coating		---		Name	Data	Scale	1.5:1		Resistance to Slat Spray		White Rust	Min ...hr	
Tolerances		---		Drawn	M.Abadian	1403/07/05	Safety				☐	Red Rust	Min 600 hr
		---		Checked	S.Zabihi	1403/07/05	Regularity				☐		
Other Standard		---	Confirmed	M.Abaei	1403/07/05	Unit : mm		SEPAD PITCH CO.	Customer Name	طوبی آرایش			