

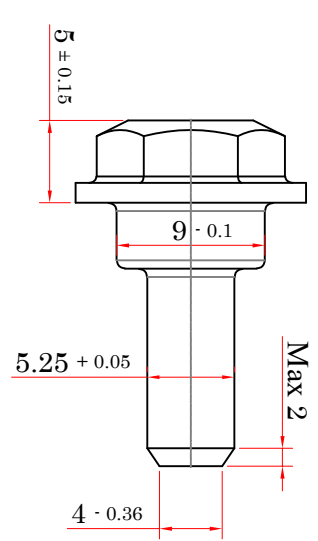
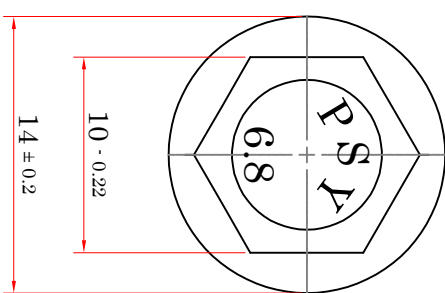


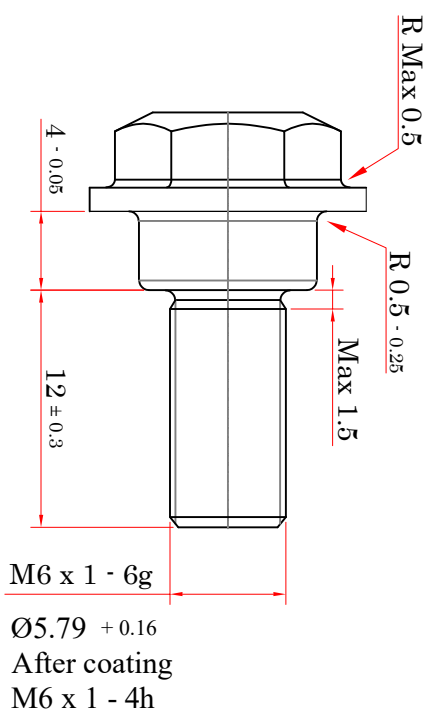

Scale :2:1

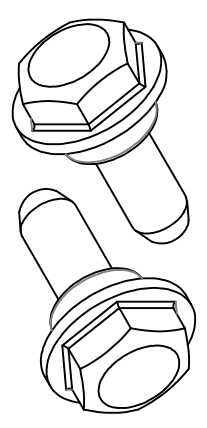

Scale : 1:1

RE.VE:	DATE	---	NAME	---	Description	---
Standard List		Part NO	9759910880			
Dimension	---	Part name	M6 x 1.0 x12			
Mechanical	C100020	DWG.NO	DN9759910880(DAC)/00			
Coating	B153320	---	Name	Data	Scale	2.5:1
Tolerances	C100220	Drawn	M.Abadipyan	03/08/27	Safety	☐
Other	B113110	Checked	S.Zabih	03/08/27	Regularity	☐
Standard	B113110	Confirmed	Mh.Abaei	03/08/27	Unit : mm	☒
 سپند پیتچ SEPAND PITCH CO.						
Machine		104S	Core Hardness		190-250 HV (90 - 100 HRB)	
Material		10B21/0B38	Surface Hardness		...	
Dia. of Material		10-11mm	T.S (Mpa)		600-800	
diameter blank		8.75-8.80	Y.S (Mpa)		480-640	
length blank		...	Proof Load(Mpa)		...	
Weight		8.01 gr	EL (%)		Min 8%	
Rod Production process		PASAP	Type Coating		Geomet 5002	
Quality Class		6.8	Color		Silver gray	
Coating		Zink flake	Salt Spray To Sediment		Min 6001	
Customer Name :		Salt Spray To Sediment White				
Customer Name :		محمول بازاری				

- 1 - The depth of complete decarburization : Max 0.015 mm
- 2 - Depth of decarburization :Max 0.21 mm
- 3 - Coating thickness :Min 6µm
- 4 - Coating mass :Min 24gr/m²