

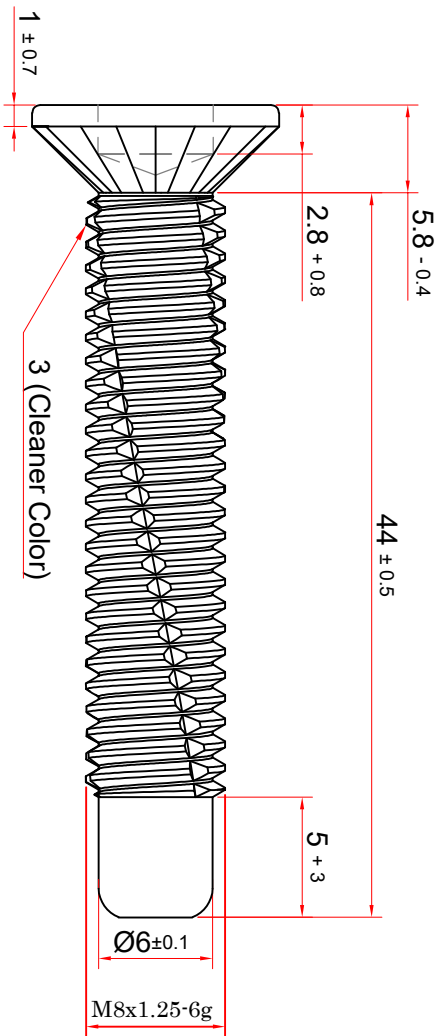


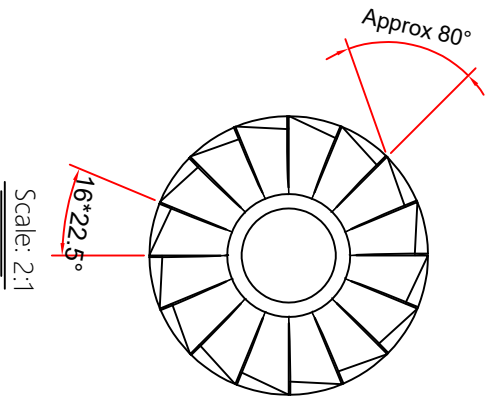

After thread $\varnothing 7.97 - 0.22$
 After Coating M8x1.25-4h
 Before thread $\varnothing 7.06 + 0.06$



Scale: 2:1

RE.VE:	DATA	---	Name	---	Description	---
Standard List		Part NO	پیچ کفہ نریلر			
Dimension	---	Part name	M8x1.25			
Mechanical	---	DWG.NO	DNM8x1.25x44/00			
Coating	---	---		Name	Data	Scale 2:1
Tolerances	---	Drawn	M.Abadiyan	03/08/05	Safety	☐
Other	---	Checked	s zabhi	03/08/05	Regularity	☐
Standard	---	Confirmed	Mh.Abaei	03/08/05	Unit : mm	☒
 سپند پیچ یزد SEPAND PITCH CO.						
Machine		84S	Core Hardness		Max 450 HV	
Material		10B36/10B21	Surface Hardness		Min 500 HV	
Dia.of Material		---	T.S (Mpa)		---	
diameter blank		---	Y.S (Mpa)		---	
length blank		---	Proof Load(Mpa)		---	
Weight		---	EL (%)		---	
Rod Production process		PASAP	Type Coating		---	
Quality Class		10.9	Salt Spray To Sediment Red		Min 1000	
Coating		Dacromat/Salt Spray To Sediment White	Color		Silver	
Customer Name :		ماموت				