




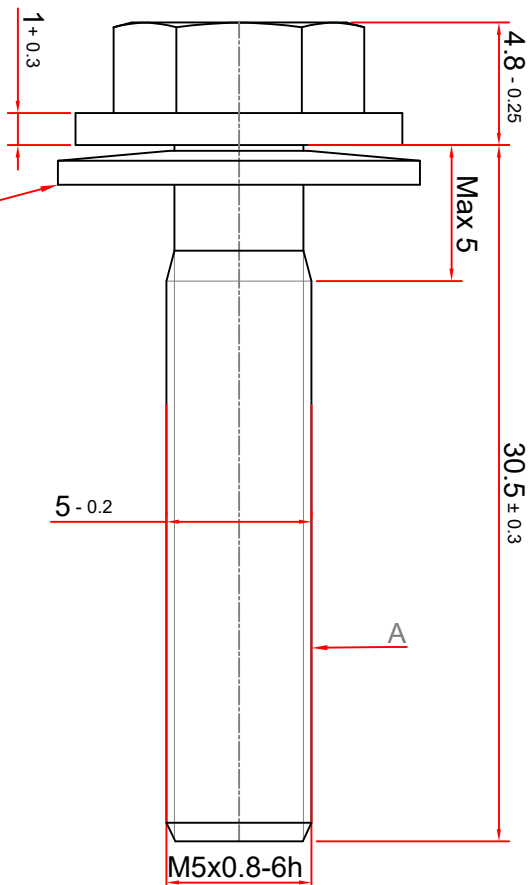


After Coating M5 x 0.8 - 6h
Before Coating M5 x 0.8 - 6g

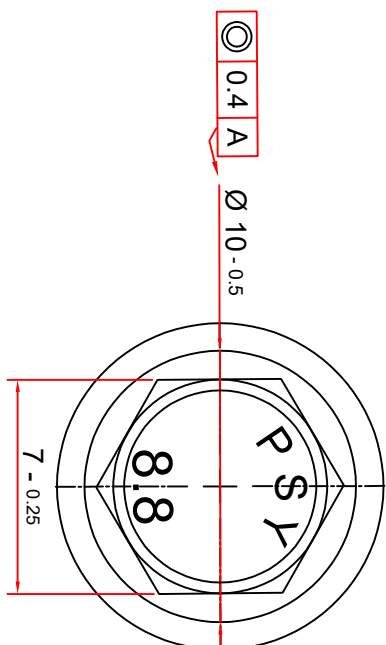

0.36 B

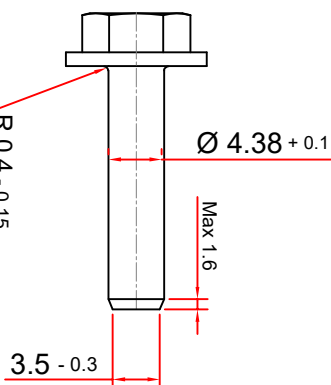

Dia. Before Thread Rolling

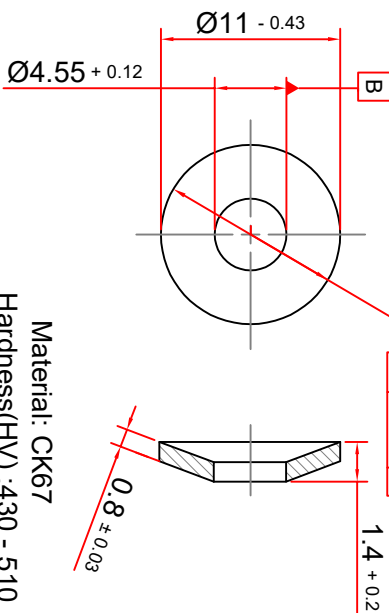

Material: CK67
Hardness(HV) : 430 - 510

RE.VE:1	DATE	02/09/19	NAME	S.Zabih	Description	افزودن پوینست به محصول
RE.VE:2	DATE	03/05/29	NAME	M.abadiyan	Description	اضافه کردن کلاس نسبی 6h, 6g
RE.VE:3	DATE	03/10/22	NAME	M.abadiyan	Description	اصلاح شماره فنی طبق نام مشتری

Standard List

Dimension	---	Part NO	JFZ1613-009
Mechanical	ISO 898-1	Part name	M5x0.8x30.5-6h
Coating	---	DWG.NO	DNJFZ1613-009/03
Tolerances	---	Name	S.Zabih
Other	---	Checked	M.Irandost
Standard	---	Confirmed	K.Farahmand



سپند پیچ یزد
SEPAND PITCH
CO.

Coating thickness : Min 8µm

Machine	---	Core Hardness(HRC)	22-31
Material	10B21/ 10B38	Surface Hardness	---
Dia.of Material	---	T.S (Mpa)	Min 800
diameter blank	---	Y.S (Mpa)	Min 640
length blank	---	Proof Load	---
Weight	---	EL (%)	Min 12%
Rod Production process	SALP1	Type Coating	---
Quality Class	8.8	Color	White
Coating	Coronate	Salt Spray To Sediment Red	Min 72h
Customer Name :	استام صنعت	Salt Spray To Sediment White	---