
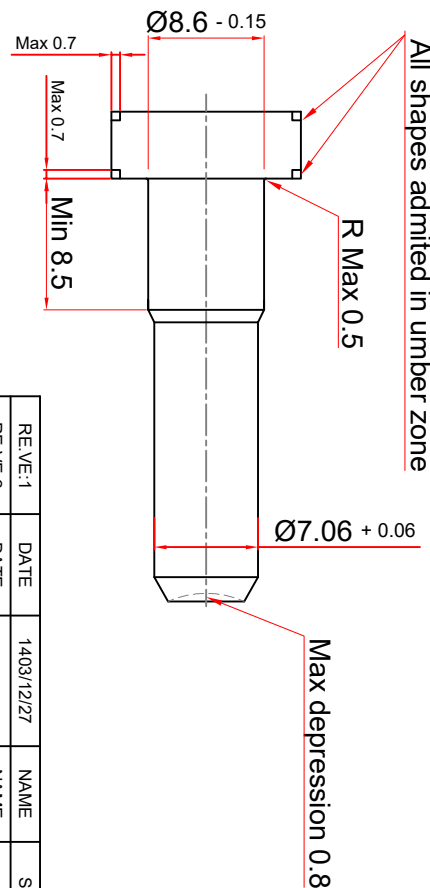
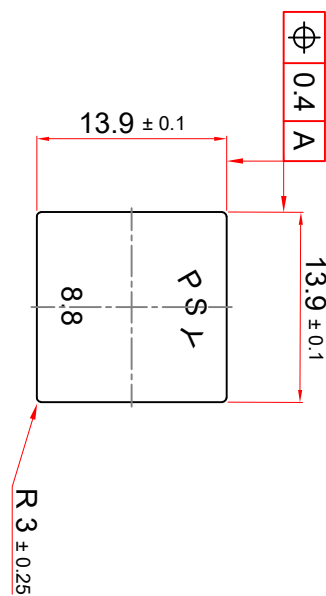


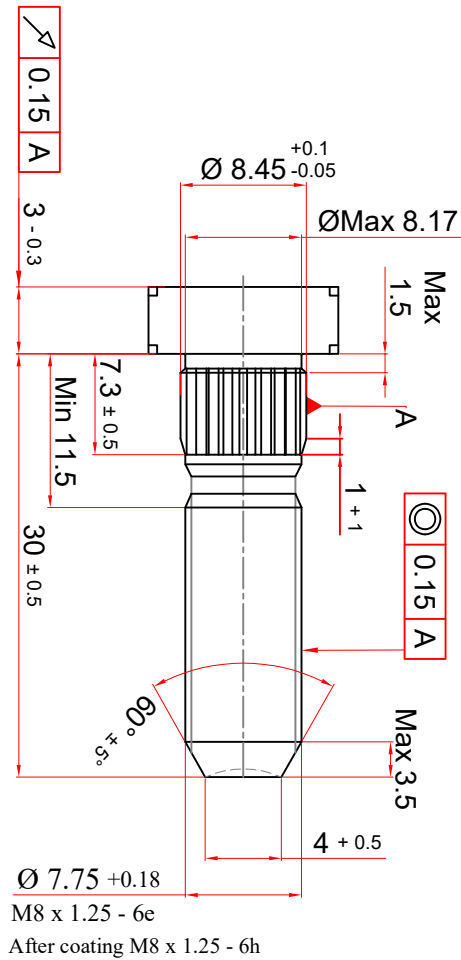

RE.V.E.1	DATE	1403/12/27	NAME	S. Abbasi	Description	استدراج دستی قیال آج و قطر زیر آج و استدراج شیب قطبی	Material	10B21/10B38	Quality Class	8.8
RE.V.E.2	DATE		NAME		Description		Dia of Wire	10	Core	22 - 32
RE.V.E.3	DATE		NAME		Description		Weight (gr) ≈	14.2	Surface Hardness(HV)	---
Feasibility Number :	02-143	Assembly Location	Terminal 206 Bolt				Wire Production process	SAIP2	Tensile Strength (Mpa)	Min 800
Reference Standard Are As Below :	Part NO	JFZ1951-332					Coating	Chromate	Yield Strength (Mpa)	Min 640
Dimension	---	Part name	M8 x 1.25 x 30				Coating Type	...	Proof Load(N)	---
Mechanical	ISO 898-1	DWG.NO	DNJFZ1951-332/01				Chromate Color	White	EL (%)	Min 12
Coating	---	Name	M. Zolfaghari	Data	02/08/29	Scale	1.5:1	Resistance to Salt Spray	White Rust	---
Tolerances	---	Checked	S. Zabihi	Regularity	02/08/29	Unit : mm		Red Rust	Min 72 hr	
Other Standard	---	Confirmed	K. Farahmand	02/08/29			SEPAHD PITCH CO.	Stam Sanat		

- 1- Number of teeth : 21
- 2- Coating thickness :Min 8 µm
- 3- Depth of complete decarburization :Max 0.015mm
- 4- Depth of decarburization :Max 0.3 mm