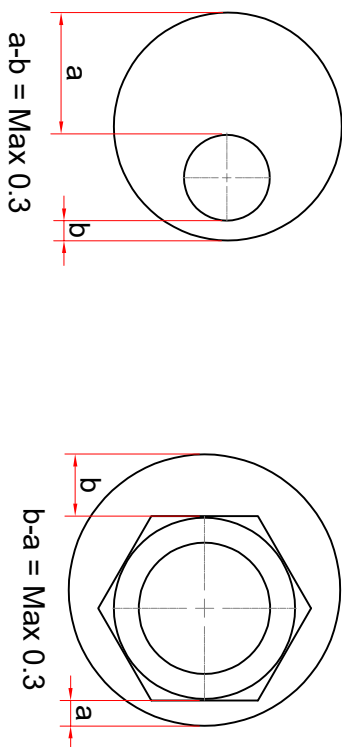
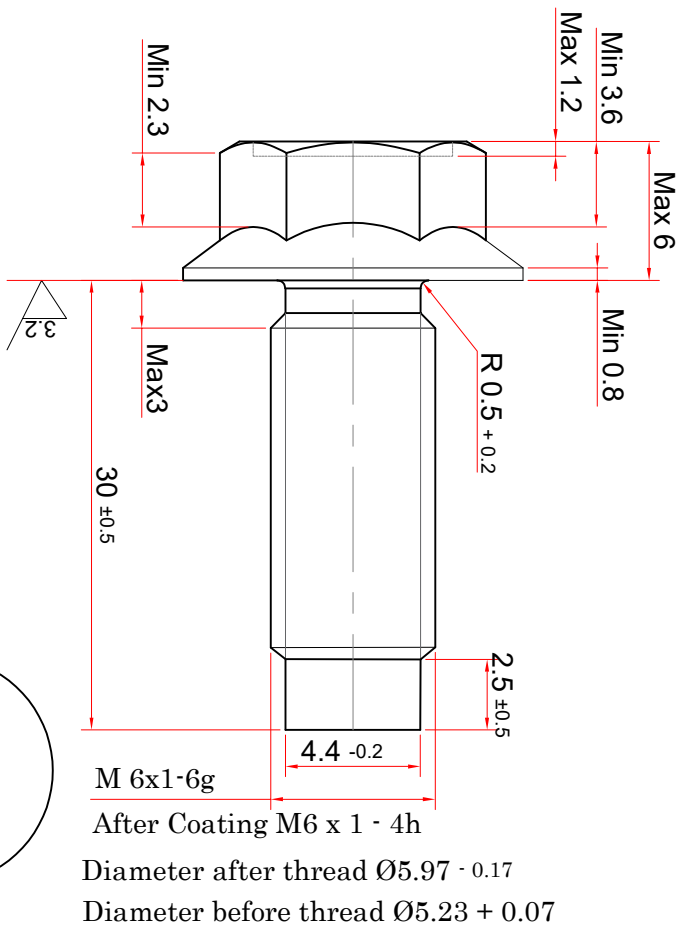


Scale:1,2:1

RE.V.E:1	DATE	---	NAME	---	Description	---
RE.V.E:2	DATE	---	NAME	---	Description	---
RE.V.E:3	DATE	---	NAME	---	Description	---
Feasibility Number :		Assembly Location ---				
Reference Standard Are As Below :			Part NO	K99794-0630		
Dimension	KES E-A007	Part name		M6x1x30		
Mechanical	KES C-F001	DWG. NO		DNK99794-0630-ZF/00		
Coating	KES C-F002		Name	Data	Scale	1.5:1
Tolerances	FREE TOL : DIN 7169	Drawn	M.Abdalyan	04/01/18	Safety	☐
		Checked	B.Salehizade	04/01/18	Regularity	☐
Other Standard	---	Confirmed	M.Botkan	04/01/18	Unit : mm	☒
			 سپند پیتچ کورد			
			SEPAKD PITCH CO.			
			Customer Name			
			حاصل سبز دلفین			
			Material	10B21 10B38	Quality Class	8.8
			Dia of Wire	9 mm	Core Hardness(HRC)	20-30
			Weight (gr) ≈	9 gr	Surface Hardness(HV)	Max 320
			Wire Production process	PASAP	Tensile Strength (Mpa)	Min 800
			Coating	Zinc Flake (Geomet 500A)	Yield Strength (Mpa)	Min 640
			Coating Type	---	Proof Load(N)	---
			Chromate Color	---	EL. (%)	Min 12
			Resistance to Salt Spray	White Rust	Red Rust	---
			Min 500 hr			

Surface area : 1774.85 mm²
Coating thickness : Min 6 µm
Depth of decarburization :Max 0.3 mm
Depth of complete decarburization :Max 0.015mm