

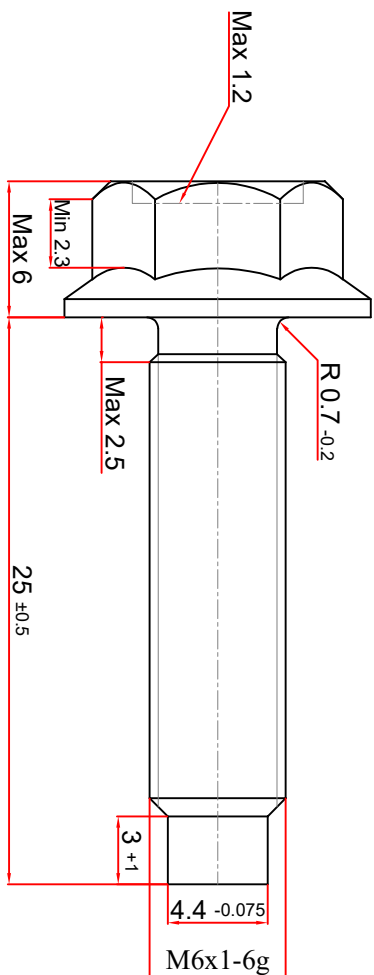





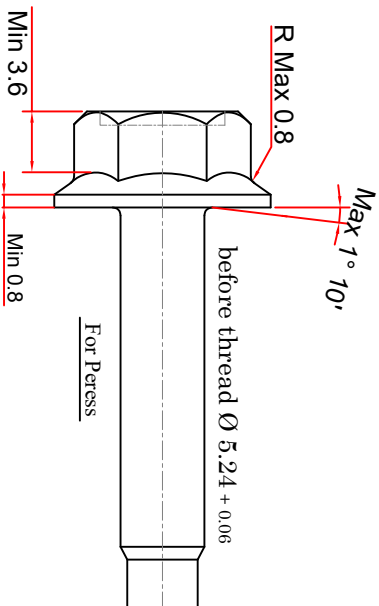

After Coating M6x1-4h
After thread Ø5.95 ± 0.12

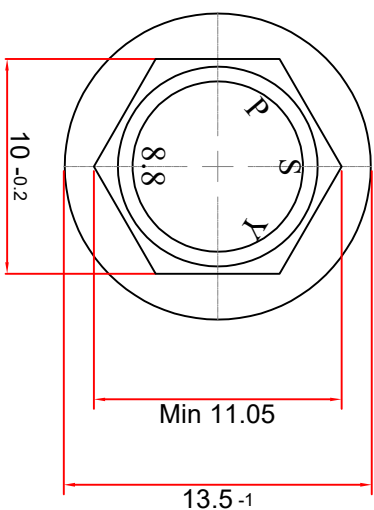

Scale: 1:2.1

Re.Ve1	DATE	---	Name	---	Description	---	Machine	64	Quality Class	8.8
Re.Ve2	DATE	---	Name	---	Description	---	Material	10B21	Core Hardness (HRC)	21-32
Re.Ve3	DATE	---	Name	---	Description	---	Dia of Material	6.5mm	Surface Hardness (HV)	Max320
Feasibility Number :	03/203	Assembly location: پیچ فلنجی خودرو پراید				Diameter Blank	5.5mm	T.S(Mpa)	785-981	Min628
Standard List	Part NO:	K997940625				Length Blank	---	Y.S(Mpa)	Min628	---
Demension	KES-E-A007B	Part Name: M6x1x25				Weight(gr)	8.43gr	Proofload (Mpa)	---	---
Mechanical	KES-C-C001	DWG.No: DNK997940625/00				Wire Productions Process	SAP2/PASAIP	EL(%)	Min12	---
Coating	KES-C-F002		Name	Date	Scale	3 : 1	Coating	Chromate	Type Coating	MFZnT1C
Tolerances	ISO 4759-1		Drawn	M.Abadian	1403/08/28	Safety	□	□	Salt Spray To Sediment White	Min72hr
Other Standard	---		Cheked	S.zabih	1403/08/28	Regularity	□	□	Salt Spray To Sediment Red	Min120hr
Confirmed	Mh.Abaei		1403/08/28	Unit : mm		Customer name:	Saze Gostar			