

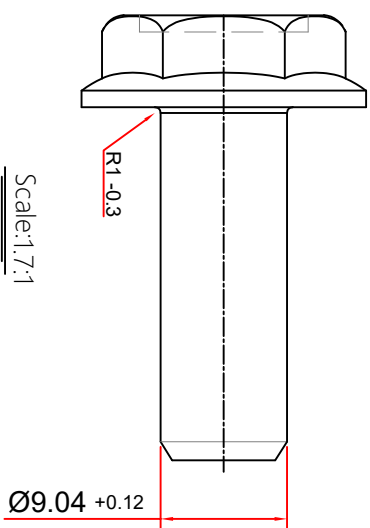
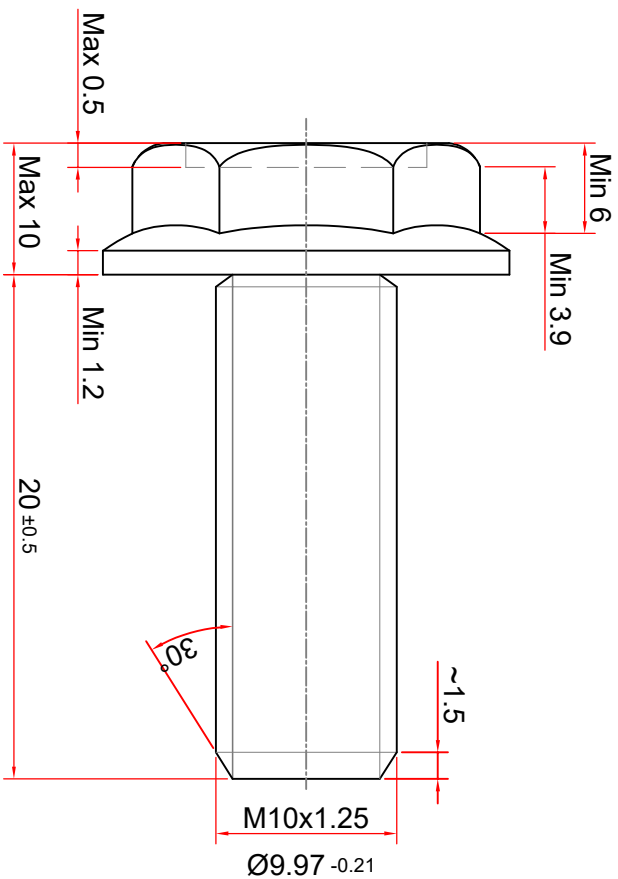


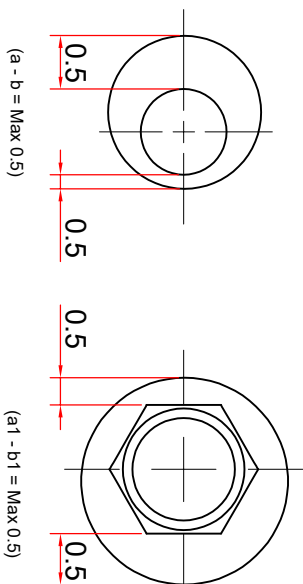


Scale: 1.7:1

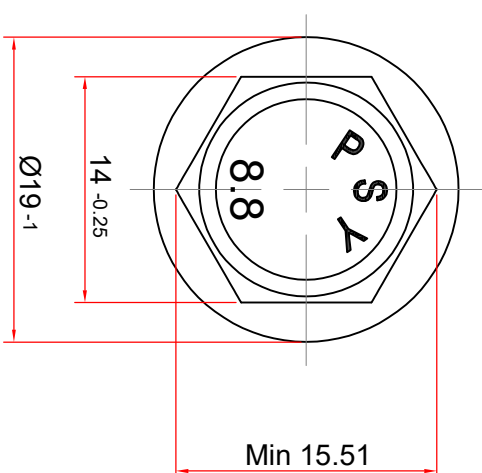

(a1 - b1 = Max 0.5)

(a - b = Max 0.5)



Coating thickness : Min 5µm

RE.VE:1	DATA	M.abadiyan	NAME	03/10/03	Description	اصلاح گریس: از گریس ۸۸ و اصلاح پارامترهای جدول و سبختی
Standard List		Part NO	K997961020			 سپند پیچ یزد SEPA ND PITCH CO.
Dimension	KES E-A007B	Part name	M10x1.25x20			
Mechanical	---	DWG.NO	DNK997961020/01			
Coating	---	---	Name	Data	Scale	
Tolerances	---	Drawn	S.Zabhi	1400/09/27	Safety	☐
Other Standard	---	Checked	M.Irandost	1400/09/27	Regularity	☐
		Confirmed	K.Farahnand	1400/09/27	Unit : mm	☒
Customer Name :		Saze Gostar				
Machine	---	Core Hardness(HRC)		21-32		
Material	10821/10838	Surface Hardness(HV)		Max 320		
Dia of Material	---	T.S (Mpa)		758-98		
diameter blank	---	Y.S (Mpa)		Min 628		
length blank	---	Proof Load (Mpa)		---		
Weight	---	EL (%)		Min 12%		
Rod Production process	SALP2	Type Coating		MEZn TiO2		
Quality Class	8.8	Salt Spray To Sediment Red		Min 120h		
Coating	Chromate	Salt Spray To Sediment White		Min 72 h		