


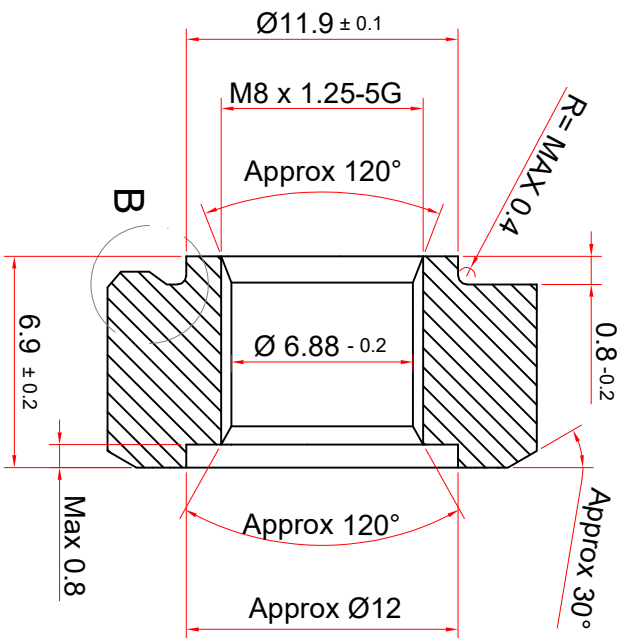
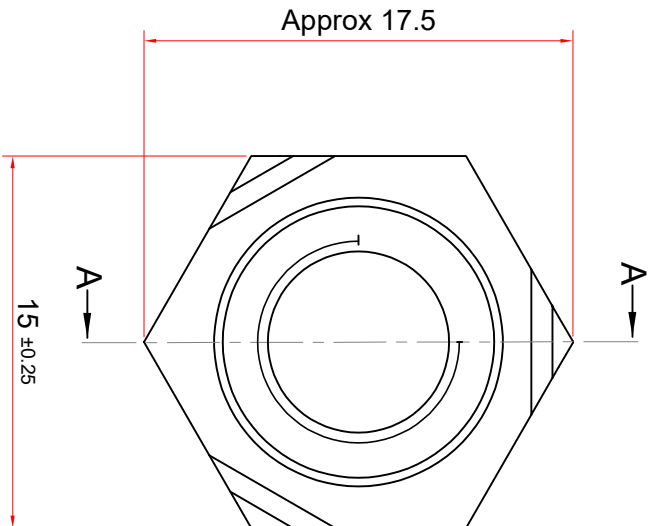


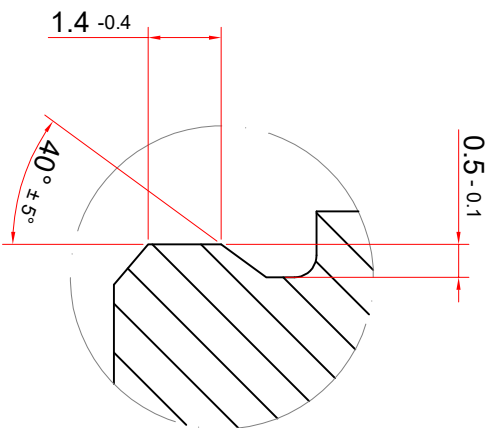

SECTION A-A



Detail B



a-b=0.4mm(Maximum)

RE.VE:1	DATE	1401/11/18	NAME	B.Salehizade	Description	تفسیر ارتفاع مهره										
RE.VE:2	DATE	1402/04/03	NAME	B.Salehizade	Description	اصلاح کلاس نقی زرنه به 5G										
RE.VE:3	DATE	1403/12/15	NAME	M.Abdolyan	Description	اصلاح تئرانس یک مهره										
Feasibility Number :		---		Assembly Location		---										
Reference Standard Are As Below :			Part NO		K99917-0800											
Dimension		KES E-B016A	Part name		M8x1.25-5G											
Mechanical		KES E-B016A	DWG.NO		DNK99917-0800/03											
Coating		---			Name		Data	Scale	3:1	 سپند پیچ کورد						
Tolerances		---	Drawn		B.Salehizade		00/12/04	Safety	☐							
			Checked		M.Irandost		00/12/04	Regularity	☐							
Other Standard		---	Confirmed		K.Farahmand		00/12/04	Unit : mm		SEFAND PITCH CO.						
Customer Name :											Saze Gostar					
Material											1008-1010		Quality Class		6	
Dia of Wire											---		Core Hardness(HB)		140-302	
Weight (gr) ≈											---		Surface Hardness(HV)		---	
Wire Production Process											SAP1 SAP2		Tensile Strength (Mpa)		---	
Coating											---		Yield Strength (Mpa)		---	
Coating Type											---		Proof Load(MPa)		588	
Chromate Color											---		EL (%)		---	
Resistance to Salt Spray													White Rust		---	
													Red Rust		---	