
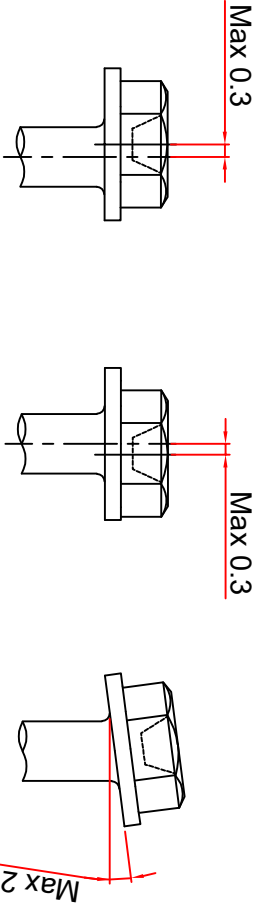
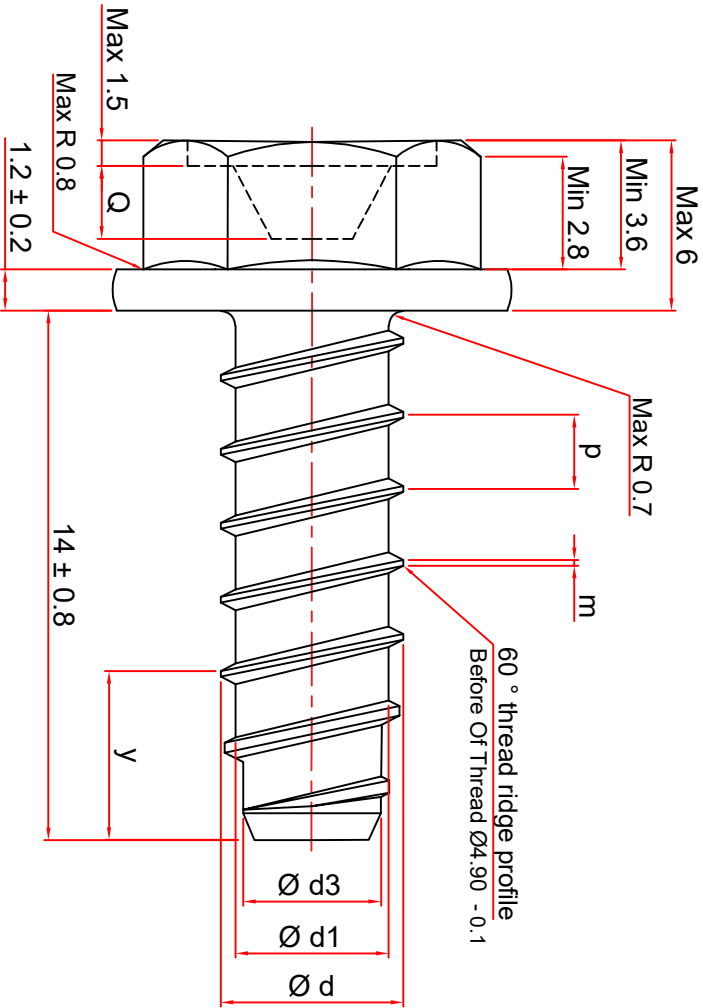


Nominal diameter 99734		6
d	Max	6
	Min	5.85
d1	Max	4.6
	Min	4.4
d3	Max	4.4
	Min	4
p		1.81
Number of threads		14
m	Max	0.15
	Max	3.6
Short Thread end	Min	2.7
	Max	4.5
Long Thread end	Min	3.6
	Max	6.2
Depth (Q)	Min	2.30
	Max	2.86
A		8.5
S	Max	10

Unit :mm



RE. VE:	DATA	---	NAME	---	Description	---
Standard List		Part NO	MB09258505			
Dimension	---	Part name	M6*14			
Mechanical	---	DWG. NO	DNMB09258505/00			
Coating	---	---	Name	Data	Scale	4:1
Tolerances	---	---	Drawn	S Zabhi	00/09/26	Safety
			Checked	M.Irandost	00/09/26	Regularity
Other Standard	---	---	Confirmed	K.Farahmand	00/09/26	Unit : mm
سپند پیچ یزد 						
SEPAND PITCH CO.						

Machine	---	Core Hardness	200-400 HV
Material	10B21/1022 /10B38	Surface Hardness	450-750 HV
Dia.of Material	---	T.S (Mpa)	---
diameter blank	---	Y.S (Mpa)	---
length blank	---	Proof Load(Mpa)	---
Weight	5 gr	EL (%)	---
Rod Production process	---	Type Coating	MFZNT1-C
Quality Class	---	Color	Golden
Coating	Coromate	Salt Spray To Sediment Red	Min 120h
Customer Name :		Salt Spray To Sediment Withe	Min 72 h
		Saze Gostar	

Coating thickness : Min 5um