

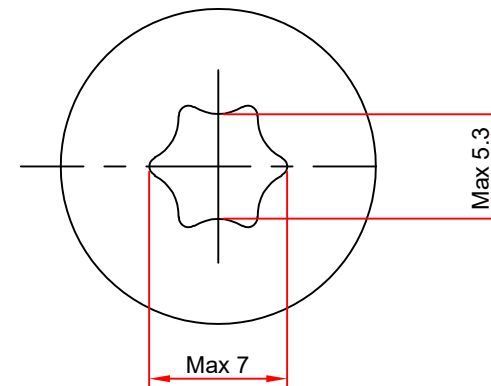
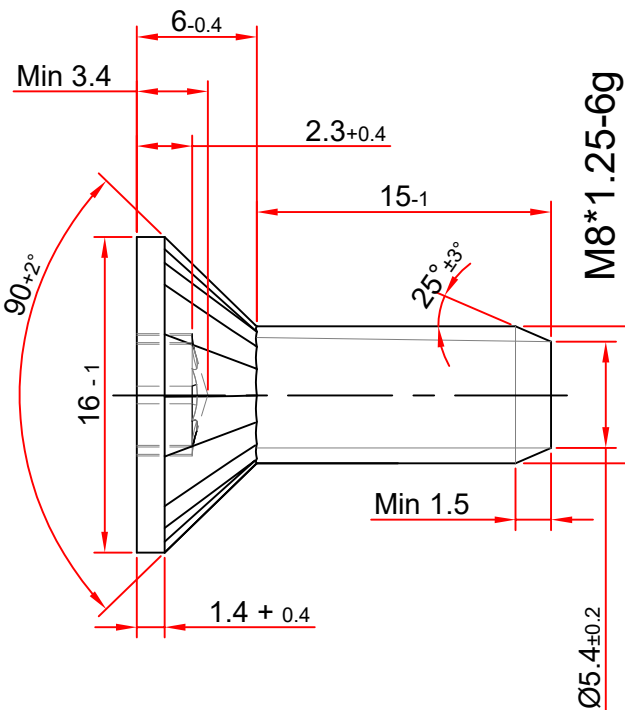




After of thread $\varnothing 7.76_{+0.2}$
Before of thread $\varnothing 7.04_{+0.12}$



Torx : T40

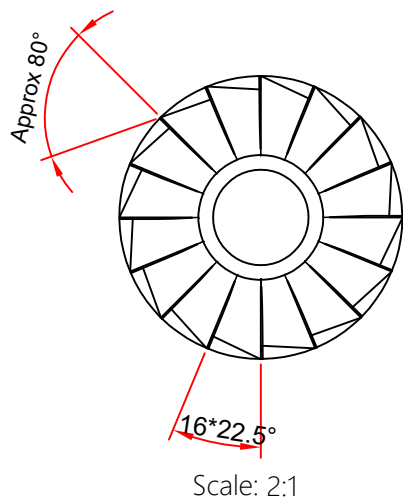

Coating thickness : Min 5µm

RE.VE:	DATA	---	NAME	---	Description	---	Machine	---	Core Hardness	21-31 HRC	
							Material	10B21/10B38	Surface Hardness	---	
Standard List		Part NO	OK-240-58-362				 سپند پیچ یزد	Dia.of Material	---	T.S (Mpa)	785-981 Mpa
Dimension	---	Part name	M8*1.25*15-8.8-6g					diameter blank	---	Y.S (Mpa)	Min 571 Mpa
Mechanical	---	DWG.NO	DNOK-240-58-362/00					length blank	---	Proof Load	---
Coating	---	---	Name	Data	Scale	2.3:1		Weight	---	EL (%)	Min 12%
Tolerances	---	Drawn	S.Zabihi	00/09/22	Safety	☐		Rod Production process	SAIP2	Type Coating	MFZNT-1C
								Color		Golden	
							Quality Class	8.8	Salt Spray To Sediment Red	Min 120h	
							Coating	Coromate	Salt Spray To Sediment Withe	Min72 h	
Other Standard	---	Confirmed	K.Farahmand	00/09/22	Unit : mm		Customer Name :		Saze Gostar		
							SEPAND PITCH CO.				