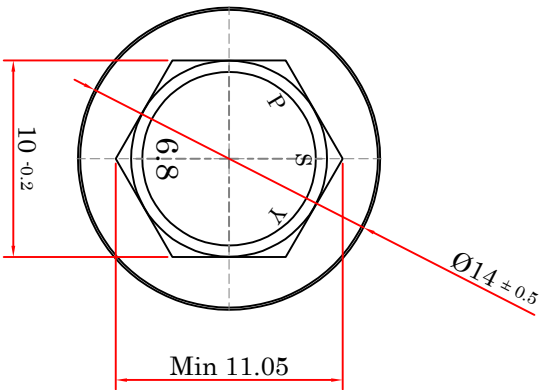
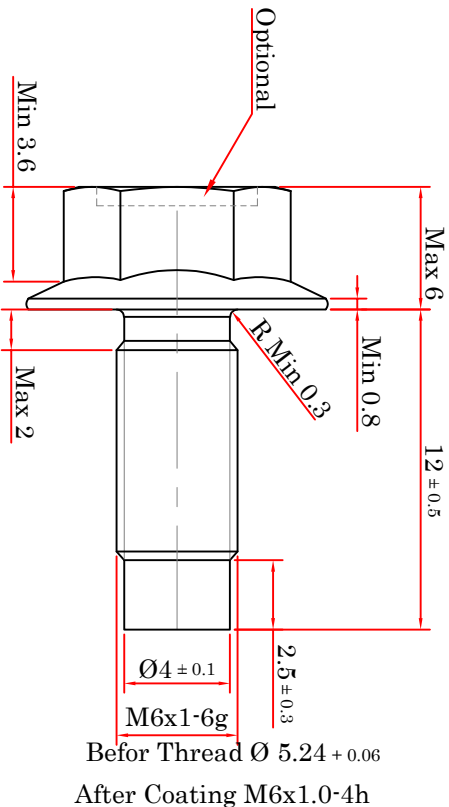


Scale:1:1

Coating thickness : Min 5 µm

Re.Ve1	DATE	---	Name	---	Description	---	Machine	64S	Quality Class	6.8
Re.Ve2	DATE	---	Name	---	Description	---	Material	10B21-10B38	Core Hardness (HRB)	89-99.5
Re.Ve3	DATE	---	Name	---	Description	---	Diaof Material	6.5mm	Surface Hardness (HV 0.3)	---
Feasibility Number:	02-238	Assembly location:				بیج فلنجی کولر کوئیک	Diameter Blank	5.60mm-5.65mm	T.S (Mpa)	Min 600
Standard List	---	Part NO:				R1851-40270	Length Blank	---	Y.S (Mpa)	480
Dimension	---	Part Name:				M6x1x12-6g	Weight(gr)	---	Proofload (Mpa)	---
Mechanical	ISO 898-1	DWG.No:				DNR1851-40270/00	Wire Productions Process	SAIP 2	EL(%)	---
Coating	KES C-F002	Name				Date	Scale	4 : 1	Type Coating	
Tolerances	ISO 4759-1	Drawn				M.Abadryan	1403/05/27	Safety	Chromate	
Other Standard	---	Cheked				S.zabihli	1403/05/27	Regularity	Salt Spray To Sediment White	
		Confirmed				Mh.Abaei	1403/05/27	Unit : mm	Salt Spray To Sediment Red	
									Min 120 h	

Customer name	IRANIAN SANDEN
---------------	----------------