

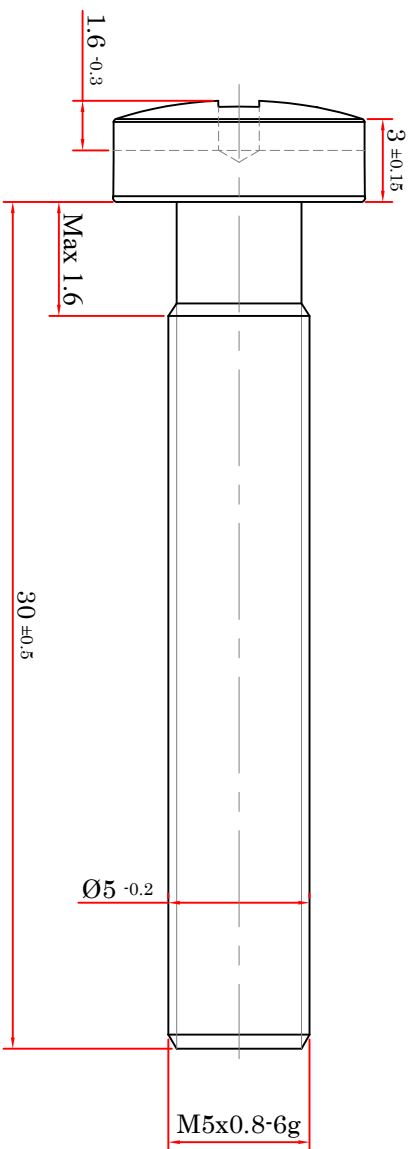




Before Therad $\text{Ø}4.3 +0.2$
After Coating M5x0.8-6h

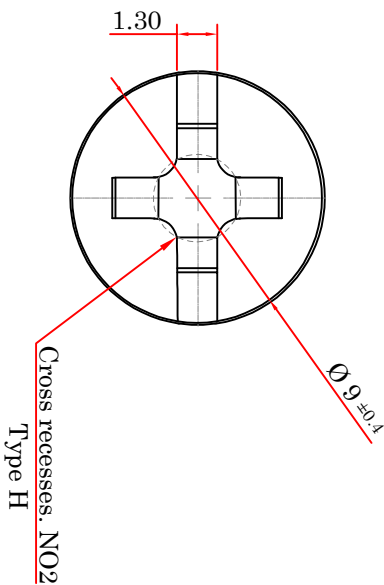

Scal 1:1

Re.Ve1	DATE	1403/08/05	Name	M.Abadyan	Description	اصلاح رنگ پوشش	Machine	---	Quality Class	8.8	
Re.Ve2	DATE	1403/08/09	Name	M.Abadyan	Description	اصلاح گریس و جنس مواند سختی	Material	10B21	Core Hardness (HRC)	22-32	
Re.Ve3	DATE	1403/09/03	Name	M.Abadyan	Description	اصلاح پارامتر سختی	Dia of Material	5.5mm	Surface Hardness (HV)	---	
Feasibility Number	02-248	Assembly location: پنج چهارسو مجموعه کولر کوئیک					Diameter Blank	4.31-4.36mm	T.S (Mpa)	Min 800	
Standard List	Part NO: R1851-40780A						Length Blank	---	Y.S (Mpa)	Min 640	
Dimension	---	Part Name: M5x0.8x30						Weight(gr)	3.5gr	Proofload (Mpa)	---
Mechanical	ISO 898-1	DWG.No: DNR1851-40780A/03						Wire Productions	SAP 2	EL(%)	min 12%
Coating	ISO 4042			Name	Date	Scale	4 : 1	Coating	Chromate	Type Coating	MFZn8-C
Tolerances	ISO 4759-1	Drawn		M.Abadyan	1403/05/30	Safety	☒	Salt Spray To Sediment White			---
Other Standard	---	Cheked		S.zabih	1403/05/30	Regularity	☐	Salt Spray To Sediment Red			Min 48 hr
		Confirmed		Mh.Abaei	1403/05/30	Unit : mm	☒	Customer name: IRANIAN SANDEN			
سند پدج یلرد  صنایع مفقوسی سند پدج یلرد											

Coating thickness : Min 5 µm



سپید پیچ یزد

صنایع مغزی سبید پیچ یزد