


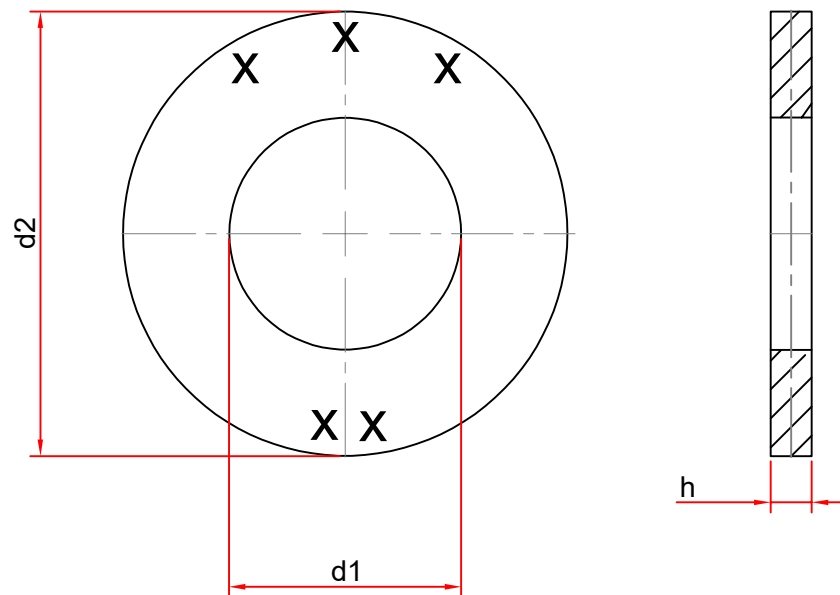

Nominal size	For Thread size	d ₁	d ₂	h
6.4	6	6.62 -0.22	12 -0.43	1.6 ±0.2
8.4	8	8.62 -0.22	16 -0.43	1.6 ±0.2
10.5	10	10.77 -0.27	20 -0.52	2 ±0.2
13	12	13.27 -0.27	24 -0.52	2.5 ±0.2
15	14	15.27-0.27	28 -0.52	2.5 ±0.2
17	16	17.27-0.27	30 -0.52	3 ±0.3
19	18	19.33 -0.33	34 -0.62	3 ±0.3
21	20	21.33 -0.33	37 -0.62	3 ±0.3
23	22	23.33 -0.33	39 -0.62	3 ±0.3
25	24	25.33 -0.33	44 -0.62	4 ±0.3
27	26	27.33 -0.33	50 -0.62	4 ±0.3
31	30	31.39 -0.39	56 -0.74	4 ±0.3

140HV=140-250HV 75 HRB = 75 - 99.5 HRB
 200HV=200-250HV 91 HRB = 91 - 100 HRB

RE.VE:1	DATE	04.01.23	NAME	S.Abbasi	Description	افزودن پارامتر مقیاس سختی		Material	...	Quality Class	---		
RE.VE:2	DATE	---	NAME	---	Description	---		Dia of Wire	...	Core Hardness(HRC)	---		
RE.VE:3	DATE	---	NAME	---	Description	---		Weight (gr) ≈	...	Surface Hardness(HV)	---		
Feasibility Number :			Assembly Location		...			Wire Production process	...	Tensile Strength (Mpa)	---		
Reference Standard Are As Below :			Part NO		DIN125			Coating	...	Yield Strength (Mpa)	---		
Dimension		DIN 125A	Part name		Washer			Coating Type	...	Proof Load(N)	---		
Mechanical		---	DWG.NO		DNDIN125/01			Chromate Color	...	EL (%)	---		
Coating		---		Name	Data	Scale	1.5:1		Resistance to Salt Spray		White Rust	---	
Tolerances		---		Drawn	M.abadiyan	03/09/10	Safety				☐	Red Rust	---
				Checked	s.zabihi	03/09/10	Regularity				☐		
Other Standard		ISO 2768	Confirmed	M.Botkan	03/09/10	Unit : mm		SEPAD PITCH CO.	Customer Name	XXX			