
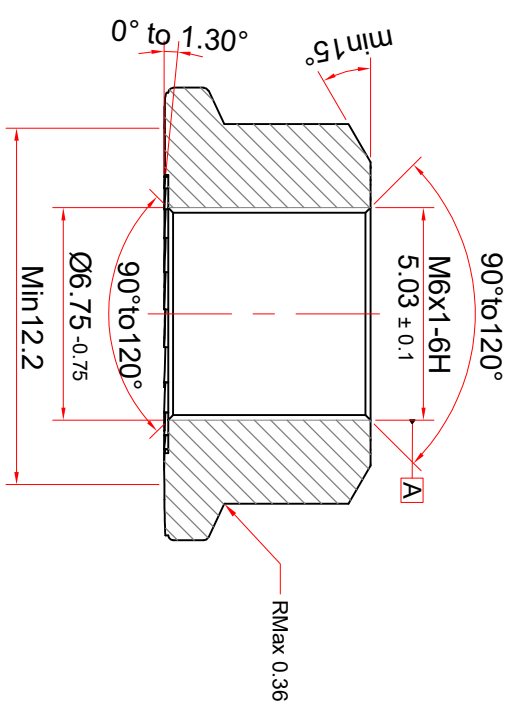
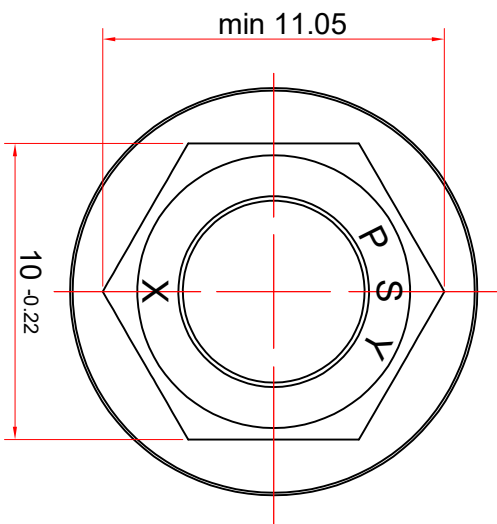
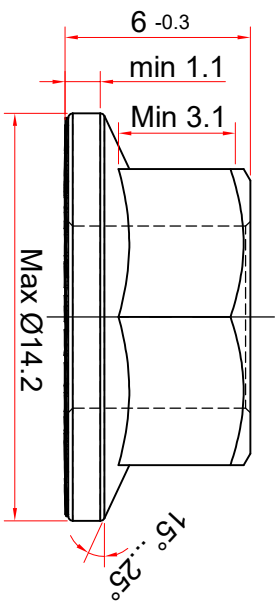


## Hardness

| CL 5 | CL 6       | CL 8      | CL 10     | CL 12     |
|------|------------|-----------|-----------|-----------|
| ---  | 150-302 HV | 200-302HV | 272-353HV | 295-353HV |

## Proof Load

| CL 5    | CL 6    | CL 8    | CL 10  | CL 12   |
|---------|---------|---------|--------|---------|
| 11700 N | 13500 N | 17200 N | 20900N | 23100 N |

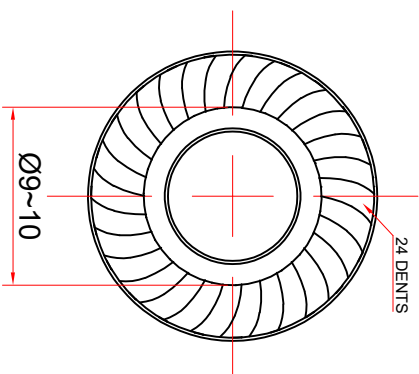

X: گريد مطابق كارت همراه محصول می باشد.

| RE.VE:                                                   | DATA          | ---                          | NAME          | ---      | Description | ---                      |
|----------------------------------------------------------|---------------|------------------------------|---------------|----------|-------------|--------------------------|
| Standard List                                            |               |                              |               |          |             |                          |
| Dimension                                                | DIN 6923      | Part NO                      | ---           |          |             |                          |
| Mechanical                                               | DIN 898-2     | Part name                    | M6*1-6H       |          |             |                          |
| Coating                                                  | ---           | DWG.NO                       | TP6923/6-1/00 |          |             |                          |
| Tolerances                                               | ISO 4759      | Drawn                        | S.Zabih       | 00/11/11 | Safety      | <input type="checkbox"/> |
| Other Standard                                           | DIN267-DIN 13 | Checked                      | M.Irandost    | 00/11/11 | Regularity  | <input type="checkbox"/> |
|                                                          |               | Confirmed                    | K.Farahmand   | 00/11/11 | Unit : mm   | <input type="checkbox"/> |
| <div> <p>سپند پیچ یرد</p> <p>SEPAND PITCH CO.</p> </div> |               |                              |               |          |             |                          |
| Machine                                                  | 10B5S         | Core Hardness                | ---           |          |             |                          |
| Material                                                 | ---           | Surface Hardness             | ---           |          |             |                          |
| Dia.of Material                                          | ---           | T.S (Mpa)                    | ---           |          |             |                          |
| diameter blank                                           | ---           | Y.S (Mpa)                    | ---           |          |             |                          |
| length blank                                             | ---           | Proof Load                   | ---           |          |             |                          |
| Weight                                                   | ---           | EL (%)                       | ---           |          |             |                          |
| Rod Production process                                   | PASAP         | Type Coating                 | ---           |          |             |                          |
| Quality Class                                            | ---           | Salt Spray To Sediment Red   | ---           |          |             |                          |
| Coating                                                  | ---           | Salt Spray To Sediment White | ---           |          |             |                          |