


M16	سایز :
DIN 7990 : 2017	استاندارد :
TP7990/16/00	شناسه :

جدول پارامترهای فنی



سپند پیچ یزد

طول (L)	تولانس طول		طول رزوه (b)	Min Ls	Max Lg
35	33.75	36.25	24.5	6.5	10.5
40	38.75	41.25	24.5	11.5	15.5
45	43.75	46.25	24.5	16.45	20.5
50	48.75	51.25	24.5	21.5	25.5
55	53.5	56.5	24.5	26.5	30.5
60	58.5	61.5	24.5	31.5	35.5
65	63.5	66.5	24.5	36.5	40.5
70	68.5	71.5	24.5	41.5	45.5
75	73.5	76.5	24.5	46.5	50.5
80	78.5	81.5	24.5	51.5	55.5
85	83.25	86.75	24.5	56.5	60.5
90	88.25	91.75	24.5	61.5	65.5
95	93.25	96.75	24.5	66.5	70.5
100	98.25	101.75	24.5	71.5	75.5
105	103.25	106.75	24.5	76.5	80.5
110	108.25	111.75	24.5	81.5	85.5
115	113.25	116.75	24.5	86.5	90.5
120	118.25	121.75	24.5	91.5	95.5
125	123	127	24.5	96.5	100.5
130	128	132	24.5	101.5	105.5
135	133	137	24.5	106.5	110.5
140	138	142	24.5	111.5	115.5
145	143	147	24.5	116.5	120.5
150	148	152	24.5	121.5	125.5

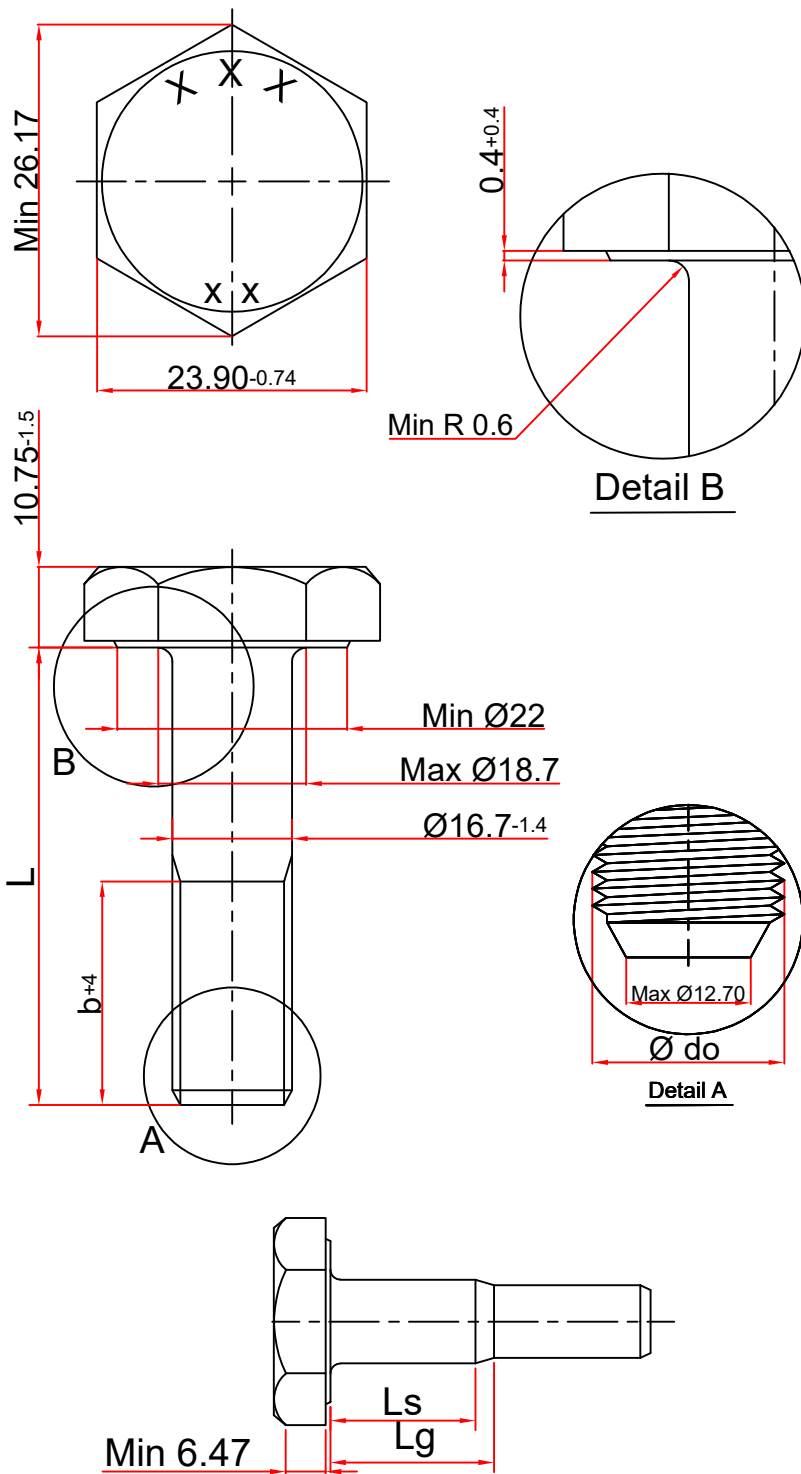

2	گام
طبق برنامه تولید	مارک (XXX)
طبق برنامه تولید	گرید (XX)

TP7990/16/00	---	00/07/21	---
Drawn : S.Zabihi		Cheked : M.Irandost	
Confirmed : K.Farhmand			
قطر رزوه (do)		قطر قبل از رزوه	
Max	Min	Max	Min
15.90	15.70	14.64	14.52
6g			