


M20	سایز :
DIN 7990 : 2017	استاندارد :
TP7990/20/01	شناسه :

جدول پارامترهای فنی



سپند پیچ یزد

طول (L)	تولانس طول		طول رزوه (b)	Min Ls	Max Lg
40	38.75	41.25	28.5	6.5	11.5
45	43.75	46.25	28.5	11.5	16.5
50	48.75	51.25	28.5	16.5	21.5
55	53.5	56.5	28.5	21.5	26.5
60	58.5	61.5	28.5	26.5	31.5
65	63.5	66.5	28.5	31.5	36.5
70	68.5	71.5	28.5	36.5	41.5
75	73.5	76.5	28.5	41.5	46.5
80	78.5	81.5	28.5	46.5	51.5
85	83.25	86.75	28.5	51.5	56.5
90	88.25	91.75	28.5	56.5	61.5
95	93.25	96.75	28.5	61.5	66.5
100	98.25	101.75	28.5	66.5	71.5
105	103.25	106.75	28.5	71.5	76.5
110	108.25	111.75	28.5	76.5	81.5
115	113.25	116.75	28.5	81.5	86.5
120	118.25	121.75	28.5	86.5	91.5
125	123	127	28.5	91.5	96.5
130	128	132	28.5	96.5	101.5
135	133	137	28.5	101.5	106.5
140	138	142	28.5	106.5	111.5
145	143	147	28.5	111.5	116.5
150	148	152	28.5	116.5	121.5
155	153	157	28.5	121.5	126.5
160	158	162	28.5	126.5	131.5
165	163	167	28.5	131.5	136.5
170	168	172	28.5	136.5	141.5
175	173	177	28.5	141.5	146.5
180	178	182	28.5	146.5	151.5

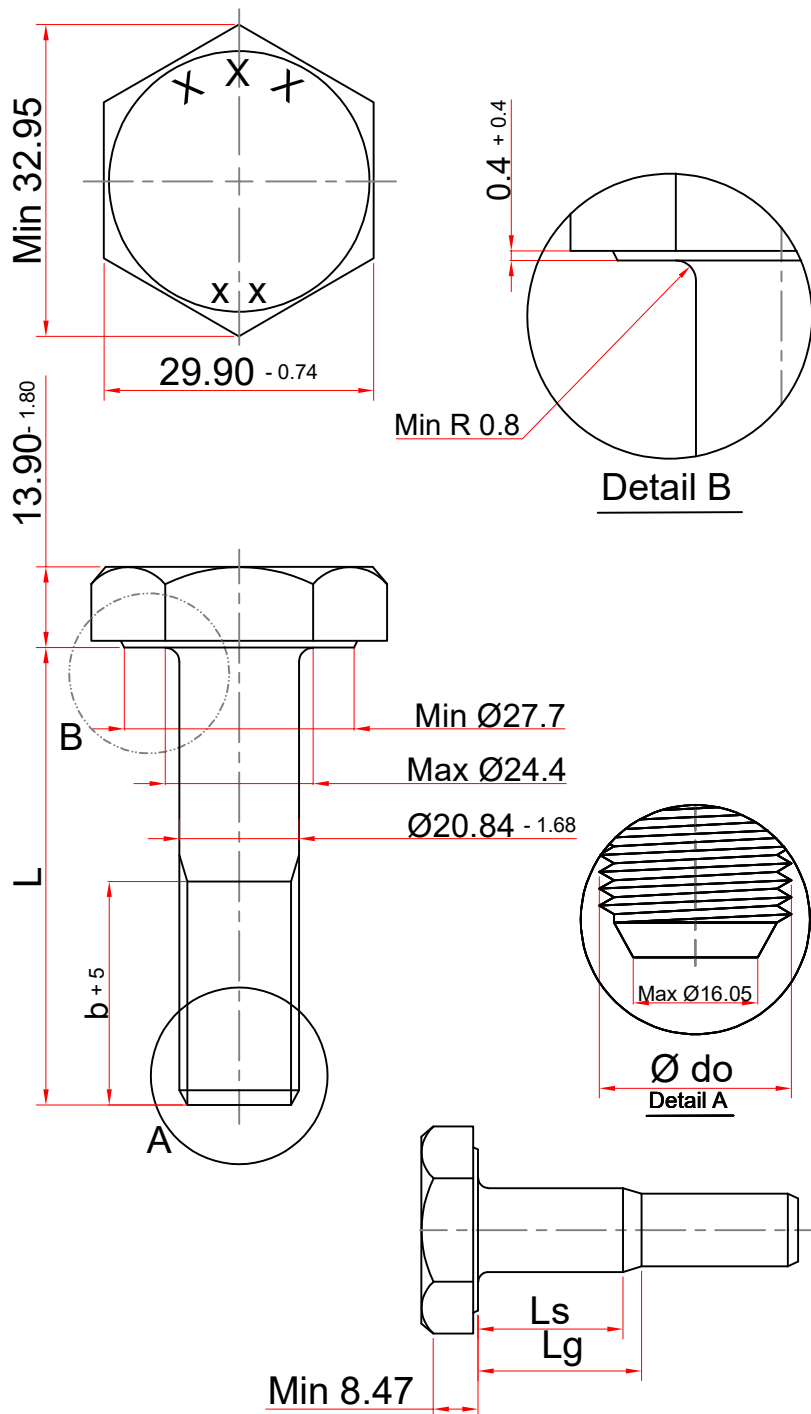

2.5		گام		قطر رزوه (do)		قطر قبل از رزوه		تولرانس لقی رزوه
طبق برنامه تولید		مارک (XXX)		Max	Min	Max	Min	
طبق برنامه تولید		گرید (XX)		19.90	19.64	18.31	18.18	6g
				Name	Drawn : S.Zabihi	Cheked : M.Irandost		