


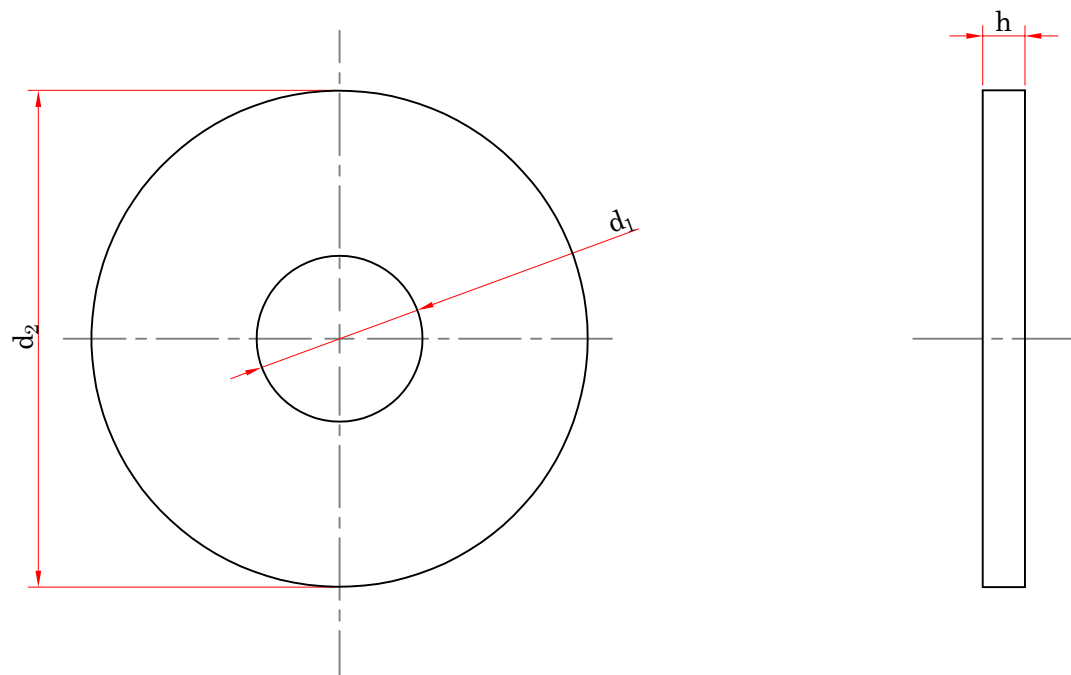

Scale For Size A : 6
3 : 1

Size	d ₁		d ₂		h	
	min	max	min	max	min	max
6	6.40	6.62	17.57	18.00	1.4	1.8
8	8.40	8.62	23.48	24.00	1.8	2.2
10	10.50	10.77	29.48	30.00	2.3	2.7
12	13.00	13.27	36.38	37.00	2.7	3.3
14	15.00	15.27	43.38	44.00	2.7	3.3
16	17.00	17.27	49.38	50.00	2.7	3.3
18	19.00	19.33	55.26	56.00	3.7	4.3
20	21.00	21.33	59.26	60.00	3.7	4.3
22	23.00	23.52	64.8	66.00	4.4	5.6
24	25.00	25.52	70.8	72.00	4.4	5.6
27	30.00	30.52	83.6	85.00	5.4	6.6
30	33.00	33.62	90.6	92.00	5.4	6.6

Quality Class	140HV		200HV		300HV	
	min	max	min	max	min	max
Hardness (HV)	140	250	200	300	300	370

RE.VE:	DATA	---	NAME	---	Description	---	Machine	---	Core Hardness	---	
							Material	---	Surface Hardness	---	
Standard List		Part NO	---				 سپند پیچ یزد SEPAND PITCH CO.	Dia.of Material	---	T.S (Mpa)	---
Dimension	DIN 9021	Part name	---					diameter blank	---	Y.S (Mpa)	---
Mechanical	DIN 9021	DWG.NO	TP9021/06-30/00					length blank	---	Proof Load (Mpa)	---
Coating	---							Weight	---	EL (%)	---
								Rod Production process	---	Type Coating	---
										Color	---
Tolerances	ISO 4759-3	Drawn	M.Zolfaghari	02/03/07	Safety	☐		Quality Class	---	Salt Spray To Sediment Red	---
Other Standard	---	Checked	s.zabihi	02/03/07	Regularity	☐		Coating	---	Salt Spray To Sediment Withe	---
		Confirmed	K.Farahmand	02/03/07	Unit : mm		Customer Name :				---