




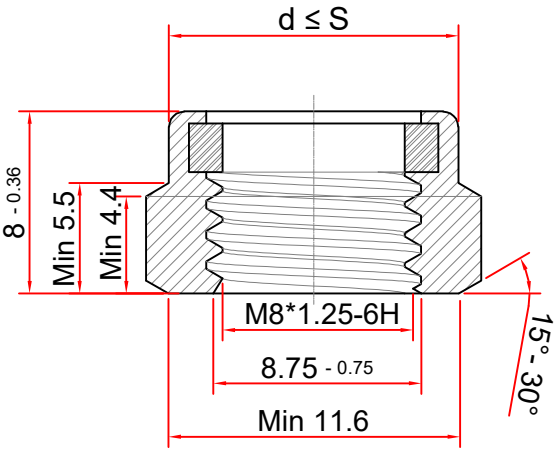



for Assembly

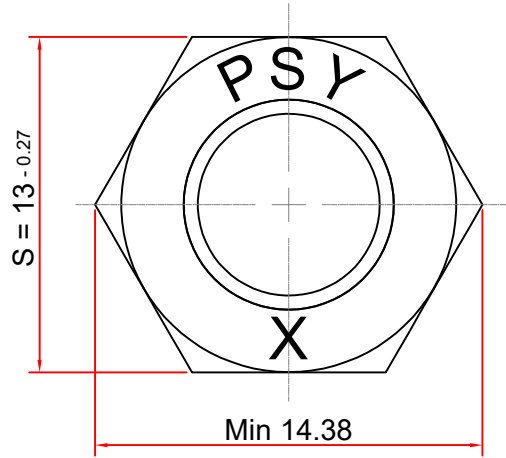

for Press

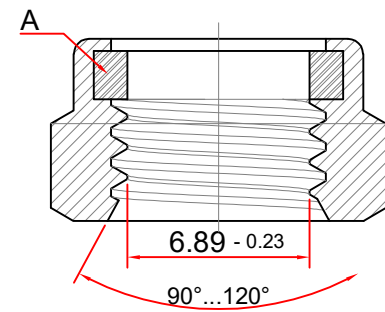

Scale : 1.9 : 1

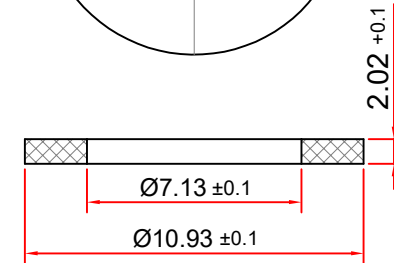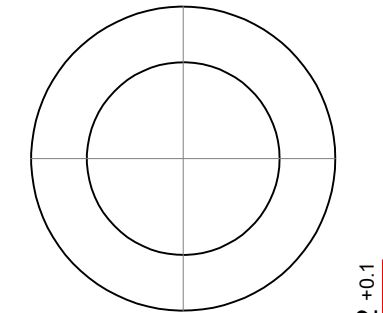

A: Prevailing Torque Element

Prevailing torque

CL 5	CL 6	CL 8	CL 10	CL 12
First fixing : Max 6 N.m			First fixing : Max 8 N.m	
First removal : Min 0.85 N.m			First removal : Min 1.15 N.m	
Fifth removal : Min 0.6 N.m			Fifth removal : Min 0.8 N.m	

Proof load

CL 5	CL 6	CL 8	CL 10	CL 12
21600 N	24900 N	30400 N	38100 N	42500 N

RE.VE:	DATA	1402/02/23	NAME	B.Salehizade	Description	صلاح ارتفاع مهره قبل از مونتاژ و اشتر	
Standard List			Part NO	---			
Dimension	DIN 985		Part name	M8*1.25-6H			
Mechanical	DIN267-15		DWG.NO	TP985/08/01			
Coating	---		---	Name	Data	Scale	2:1
Tolerances	ISO 4759		Drawn	M.Zolfaghari	01/08/16	Safety	☐
			Cheked	S.Zabihi	01/08/16	Regularity	☐
Other Standard	DIN267-15		Confirmed	K.Farahmand	01/08/16	Unit : mm	



سپند پیچ یزد

SEPAND PITCH CO.

X: گرید مطابق کارت همراه محصول می باشد.

Machine	---	Core Hardness	---
Material	---	Surface Hardness	---
Dia.of Material	---	T.S (Mpa)	---
diameter blank	---	Y.S (Mpa)	---
length blank	---	Proof Load	---
Weight	---	EL (%)	---
Rod Production process	PASAIP	Type Coating	---
		Color	Withe
Quality Class	---	Salt Spray To Sediment Red	96 h
Coating	Coromate	Salt Spray To Sediment Withe	72 h