




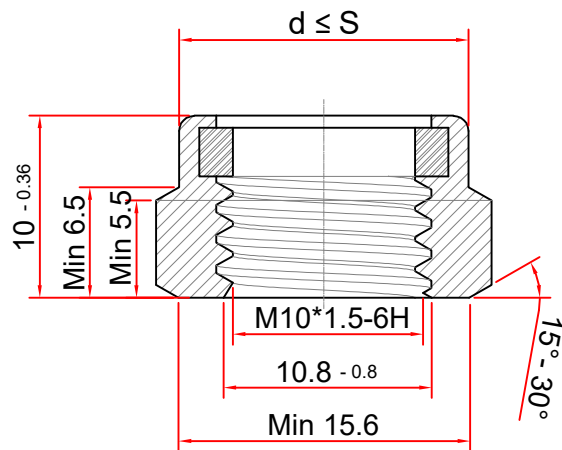


for Assembly

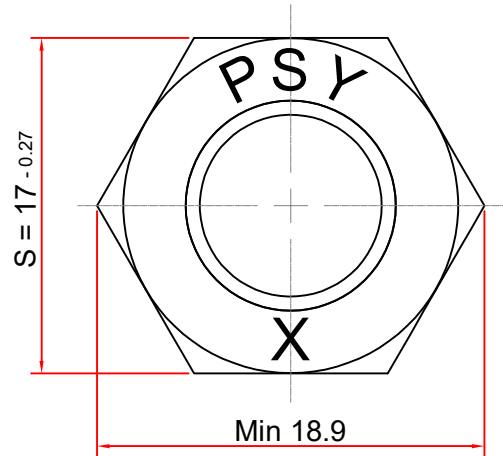

for Press

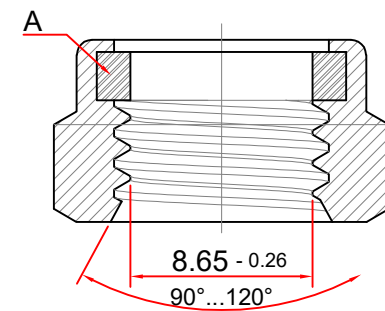

Scale : 1.9 : 1

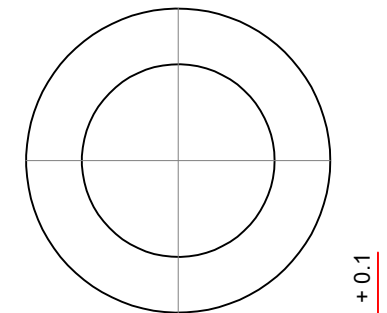


2.60 +0.1

A: Prevailing Torque Element

Prevailing torque

CL 5	CL 6	CL 8	CL 10	CL 12
First fixing : Max 10.5 N.m			First fixing : Max 14 N.m	
First removal : Min 1.5 N.m			First removal : Min 2 N.m	
Fifth removal : Min 1 N.m			Fifth removal : Min 1.4 N.m	

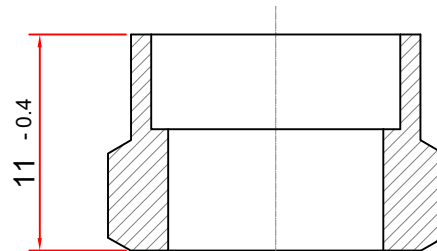

X: گرید مطابق کارت همراه محصول می باشد.

Proof load

CL 5	CL 6	CL 8	CL 10	CL 12
34200 N	39400 N	48100 N	60300 N	67300 N

RE.VE:	DATA	---	NAME	---	Description	---	Machine	---	Core Hardness	---
Standard List Part NO Part name DWG.NO --- Name Data Scale 2:1 Drawn M.Zolfaghari 01/08/16 Safety ☐ Cheked S.Zabihi 01/08/16 Regularity ☐ Confirmed K.Farahmand 01/08/16 Unit : mm   سپند پیچ یزد SEPAND PITCH CO.							Material	---	Surface Hardness	---
							Dia.of Material	---	T.S (Mpa)	---
							diameter blank	---	Y.S (Mpa)	---
							length blank	---	Proof Load	---
							Weight	---	EL (%)	---
							Rod Production process	PASAIP	Type Coating	---
									Color	Withe
							Quality Class	---	Salt Spray To Sediment Red	96 h
							Coating	Coromate	Salt Spray To Sediment Withe	72 h



سپند پیچ یزد

SEPAND PITCH
CO.