
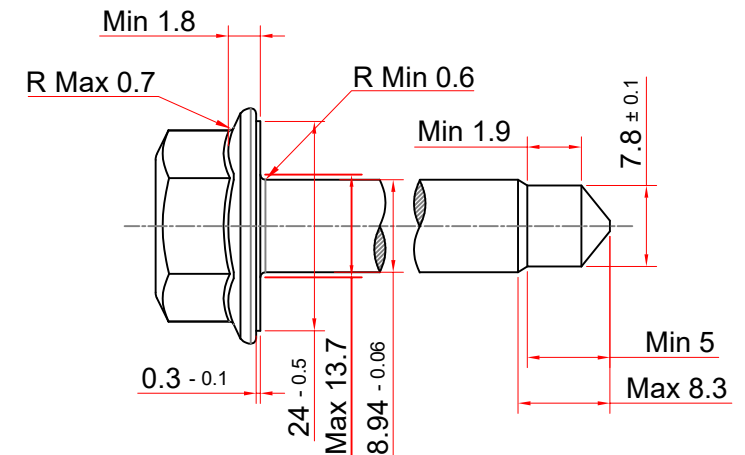
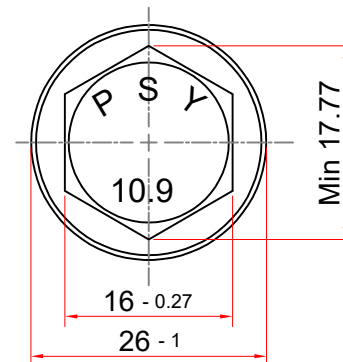
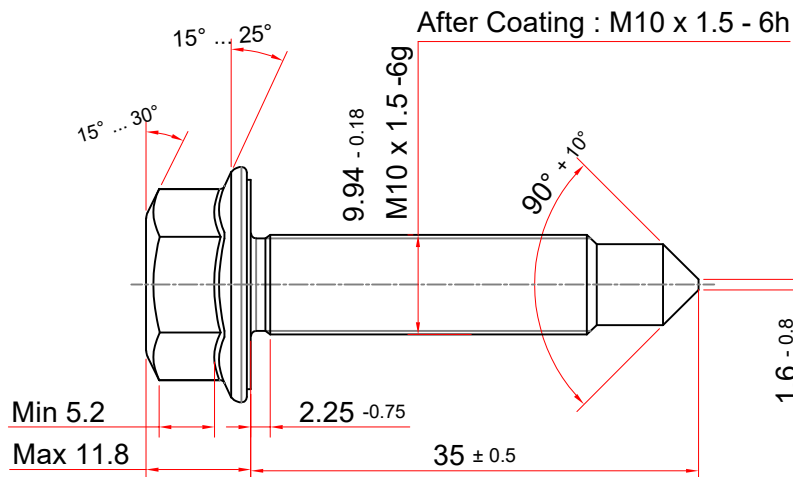


SCALE : 1:1

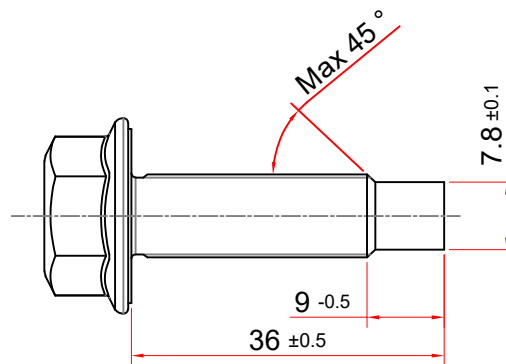

For press

- 1- $F_m : 57990 - 69590$
- 2- $FN : 0.12-0.18$
- 3- Coating mass :Min $24gr/m^2$
- 4- Without any cracks ,burrs ,pore and having zinc dacromate coating.
- 5- Grip of coating :no separated particulate $1 > mm^2$
- 6- Depth of decarburization :Max $0.3mm$
- 7- The depth of complete decarburization : Max $0.015 mm$
- 8- Check the purity of steel in accordance with the standard NFA04-106
- 9- Surface Area : $2849.7 m^2$

RE.VE:1	DATE	03/07/22	NAME	M.Abadian	Description	افزودن طول پرس به نقشه		Material	10B38/SCM435	Quality Class	10.9			
RE.VE:2	DATE	03/12/18	NAME	S.Abbasi	Description	افزودن مساحت سطح اصلاح طول نسبی و شیت نقشه		Dia of Wire	12	Core Hardness (HV)	320-380 (32-39 HRC)			
RE.VE:3	DATE	---	NAME	---	Description	---		Weight (gr) ≈	...	Surface Hardness(HV)	---			
Feasibility Number :		02-01	Assembly Location		...				Wire Production process	PASAIP	Tensile Strength (Mpa)	1040-1200		
Reference Standard Are As Below :		Part NO		IK01328280				Coating	Geomet 500A	Yield Strength (Mpa)	940-1080			
Dimension		---		Part name		M10x1.5x35				Coating Type	ZLVMGL	Proof Load(N)	---	
Mechanical		PSA C10 0020		DWG.NO		DNIK01328280/02				Chromate Color	Silver Gray	EL (%)	Min 9%	
Coating		PSA B15 3320		Name		Data	Scale	1.5:1	مهندسی پیتچ		Resistance to Slat Spray		White Rust	---
Tolerances		PSA A32 2105		Drawn M.Zolfaghari		02/02/24	Safety				Red Rust		Min 600 hr	
Other Standard		PSA D25 1075		Checked S.Zabihi		02/02/24	Regularity		SEPAND PITCH CO.		Customer Name	SAPCO		
				Confirmed K.Farahmand		02/02/24	Unit : mm							