




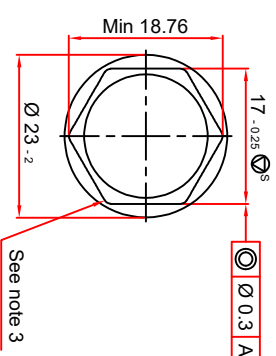


Before Machining

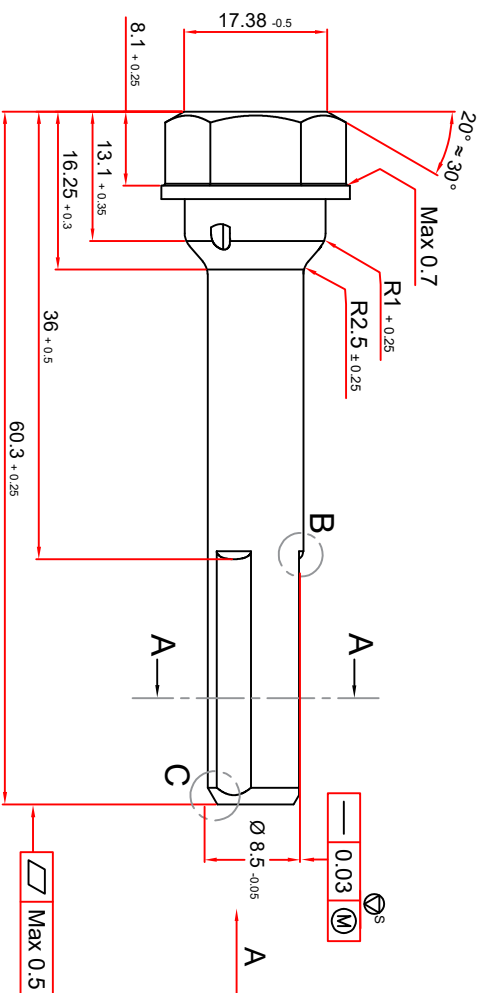


Detail B

Detail C

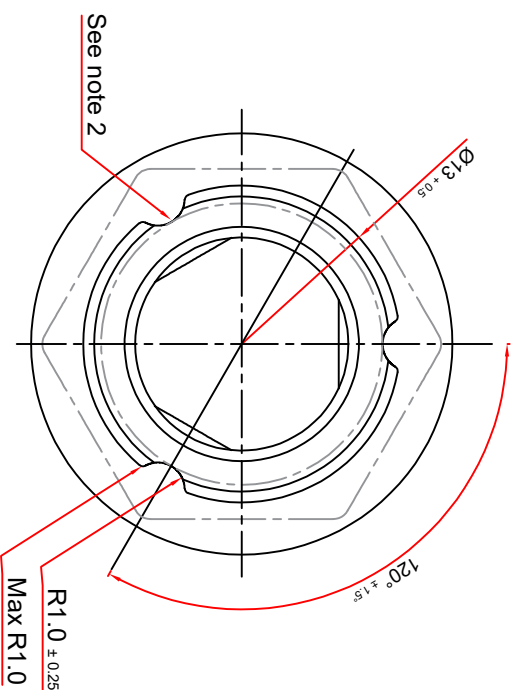

Section A-A

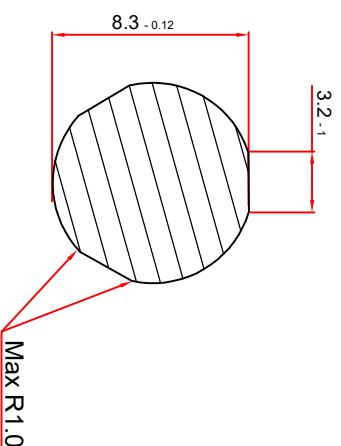

- 1- According to Customer Drawing NO : BC431-013-C2
- 2- The three grooves must be collinear with across corner (e).
- 3- The form shape edge (e) shall not be sharp.
- 4- " * " is specific characteristics & "  " is Safety Characteristic.
- 5- This drawing include machining & tapping sheets.
- 6- Coating thickness : Min 8 µm

View A

RE-VE:1	DATE	----	NAME	-----	Description	-----					Material	10B21	Quality Class	-----
RE-VE:2	DATE	-----	NAME	-----	Description	-----					Dia of Wire	...	Core Hardness(HRC)	-----
RE-VE:3	DATE	-----	NAME	-----	Description	-----								
Feasibility Number :			Assembly Location			-----					Weight (gr) ≈	...	Surface Hardness(HV)	-----
Reference Standard Are As Below :					Part NO	MT40419801								
Dimension		-----	Part name		8.5 x 60.5									
Mechanical		-----	DWG.NO		DNMT40419801									
Coating		-----			Name	Data	Scale	1.5:1	 سید پارس پارس					
Tolerances		-----	Drawn		S.Golzarai	04/08/07	Safety		Resistance to Salt Spray					
		-----	Checked		A.Baniasadai	04/08/07	Regularity		Red Rust					
Other Standard		-----	Confirmed		A.Baniasadai	04/08/07	Unit : mm		sePAND PITCH CO.		Crouse			