
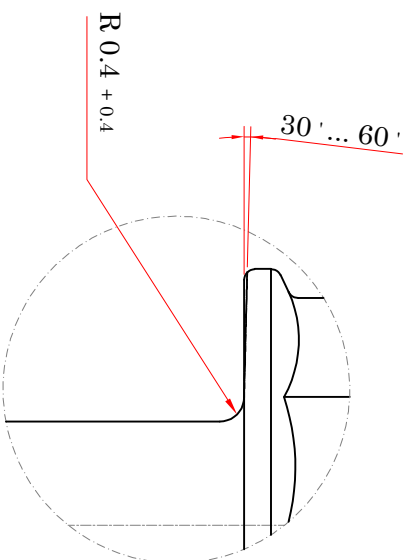

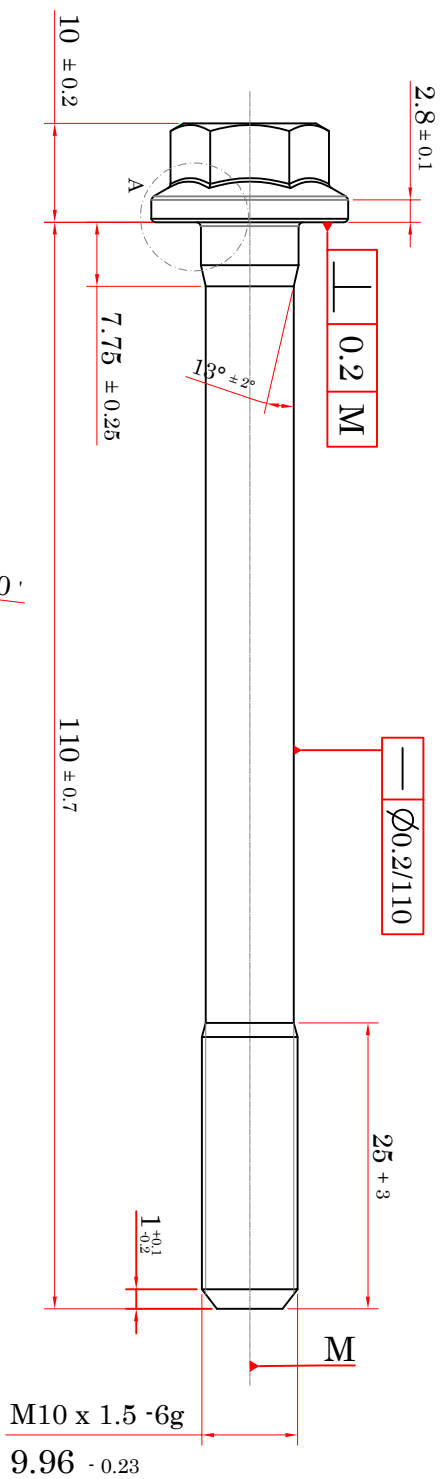


Depth of decarburization :Max 0.19mm
Depth of complete decarburization :Max 0.015mm

Detail A

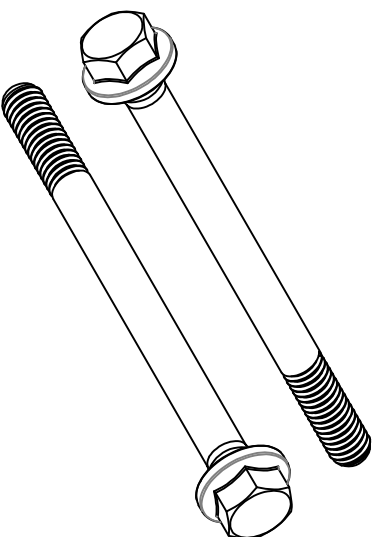

scale: 1 : 2

هنگام تولید به نام مشتری دقت نمایند

RE.VB2:	DATE	02/07/16	NAME	S.Zabih	Description	بازگویی قطر فیلچ
RE.VB3:	DATE	03/04/06	NAME	S.Zabih	Description	الفردن تست پروف لود و طول پوینت و شعاع رزبر کلکی و شعاع پوینت
RE.VB4:	DATE	03/04/12	NAME	M.Abadiyan	Description	بازگویی نقشه
Standard List		Part NO	11057-H5000			
Dimension	---	Part name	M10*1.5*110-6g			
Mechanical	NES M1010	DWG.NO	DN11057-H5000/ 04			
Coating	---	Name	Data	Scale	1.2:1	
Tolerances	---	Drawn	M.Zolaghri	Safety	□	
Other	---	Checked	S.Zabih	Regularity	□	
Standard	---	Confirmed	K.Parahmand	Unit : mm	□	

Machine	105L	Core Hardness(HRC)	40-45
Material	SCM440H/ SCM435	Surface Hardness(HV)	---
Dia of Material	12	T.S (Mpa)	1274-1421
diameter blank	9.60	Y.S (Mpa)	Min 1146
length blank	---	Proof Load(N)	74500-84100
Weight	70 gr	EL (%)	Min 12%
Production process Wire rod	PASAP	Type Coating	---
Quality Class	13	Color	---
Coating	Salt Spray To Sediment With	---	---

Customer Name : Mega Motor