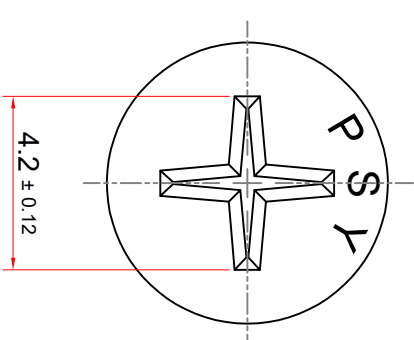
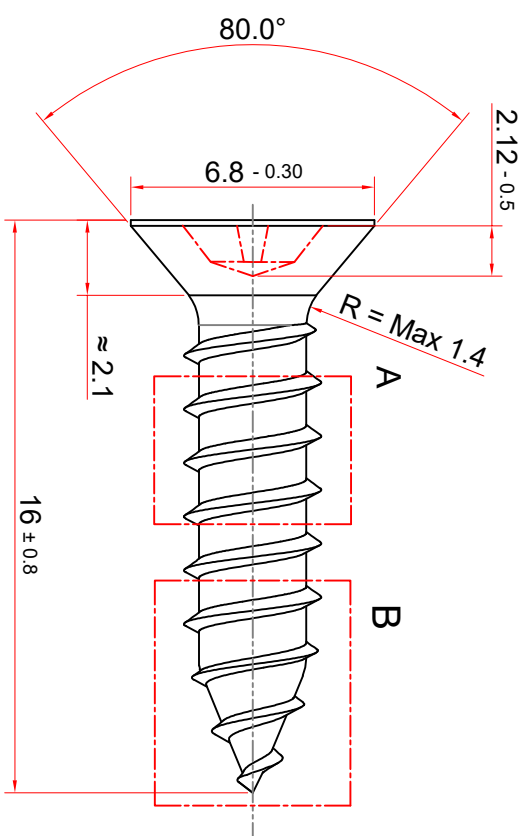


Scale 1:1

Detail A

Detail B

Case depth : 0.18 - 0.13 mm
Coating thickness : Min 5µm
Cross recess size : 2

RE.VE:	DATA	---	NAME	---	Description	----
Standard List	Part NO	---				
	Part name	ST3.5 x1.3 x 16				
	DIN 7982					
Dimension	DIN 7982					
Mechanical	DIN 267-12	DWG.NO	---			
Coating	---	---	Name	Data	Scale	5:1
Tolerances	ISO 4759	Drawn	M.Zolfaghari	01/12/10	Safety	☐
Other Standard	DIN 7970	Checked	S.Zabahi	01/12/10	Regularity	☐
		Confirmed	K.Farahmand	01/12/10	Unit : mm	
 سپند پیچ یزد SEPAND PITCH CO.						
Machine	---	Core Hardness	270 - 390 (HV)			
Material	1018/1020/1022/10B21	Surface Hardness	Min 450 (HV)			
Dia of Material	---	T.S (Mpa)	---			
diameter blank	---	Y.S (Mpa)	---			
length blank	---	Proof Load (N)	---			
Weight	10.52 gr	EL (%)	---			
Rod Production process	SAP2	Type Coating	White			
Quality Class	Cementation	Salt Spray To Sediment	---			
Coating	Chromate	Salt Spray To Sediment	50 h			
Customer Name : ----						