



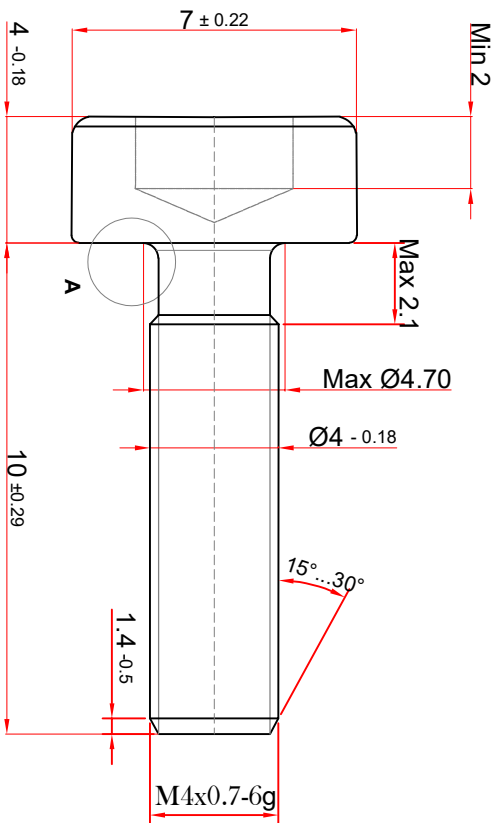

Before Thread Ø 3.45 + 0.05

Detail A



SCALE

Re.Ve1	DATE	03/08/26	Name	M.Abadyan	Description	اصلاح قطر قبل از رزو	Machine	64S	Quality Class	8.8	
Re.Ve2	DATE	03/10/22	Name	M.Abadyan	Description	حذف سارک و گرد روی پیچ	Material	10B21	Core Hardness (HRC)	22-32	
Re.Ve3	DATE	---	Name	---	Description	---	Dia.of Material	Surface Hardness (HV)	---		
Feasibility Number	02-186	Assembly location:				پیچ آلی جلوربندی	Diameter Blank		T.S (Mpa)	Min 800	
Standard List	Part NO: 101336						Length Blank	---	YS (Mpa)	Min 640	
Dimension	DIN ISO 4762	Part Name: M 4 x 0.7 x 10						Weight(gr)	---	Proofload (Mpa)	---
Mechanical	ISO 898-1	DWG.No: DN101336/02						Wire Productions Process	PASAP/SAIP 2	EL(%)	Min 12
Coating		Name		Date	Scale	3 : 1	Coating		Black oxide	Type Coating	---
Tolerances	ISO 2768	Drawn		03/08/12	Safety	☐	Salt Spray To Sediment White				---
Other Standard	---	Cheked		03/08/12	Regularity	☐	Salt Spray To Sediment Red				---
	Confirmed	Mh.Abaei	03/08/12	Unit : mm	☒	صنعت شوش سهند پیچ ساز	Customer name:		stam sanat		