

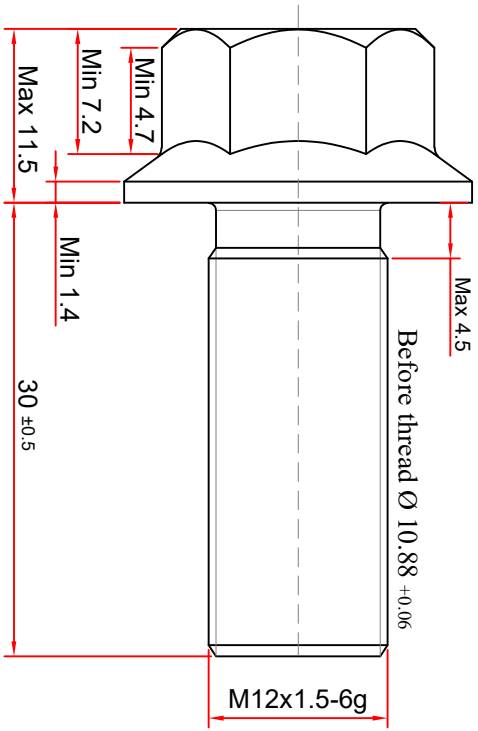

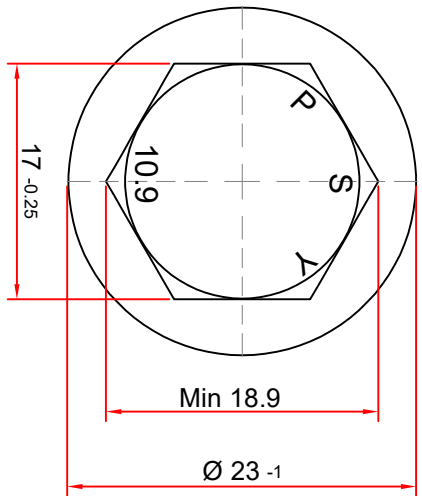


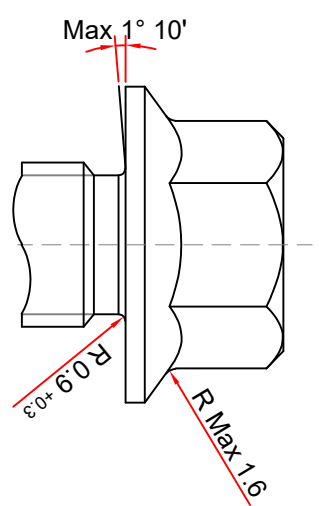

After Coating M12 x 1.5 - 4h
After thread Ø11.94 -0.19

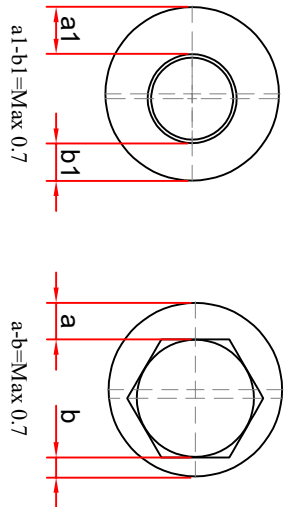

Scale

Re.Ve1	DATE	---	Name	---	Description	---	Machine	135L	Quality Class	10.9
Re.Ve2	DATE	---	Name	---	Description	---	Material	10B38	Core Hardness (HRC)	31-39
Re.Ve3	DATE	---	Name	---	Description	---	Dia of Material	13-13.5-14mm	Surface Hardness (HV)	Max 390
Feasibility Number :	03/201	پیش فیلنجی				Diameter Blank	11.60mm	T.S (Mpa)	Min 1040	
Standard List	Part NO:	K997561230				Length Blank	---	Y.S (Mpa)	Min 940	
Demension	KES E-A007B	Part Name:	M12X1.5X30				Weight (gr)	46.10g	Proofload (Mpa)	---
Mechanical	KES C-C001	DWG.No:	DNK997561230/00				Wire Productions Process	PASAP	EL (%)	Min 9
Coating	KES C-F003	Name	Date	Scale	2 : 1		Coating	Zinck Flack	Type Coating	DMF-2
Tolerances		Drawn	03/08/19	Safety	☐		Salt Spray To Sediment White			---
Other Standard		Checked	03/08/19	Regularity	☐		Salt Spray To Sediment Red			---
		Confirmed	03/08/19	Unit : mm		Customer name:	Saze Gostar			